
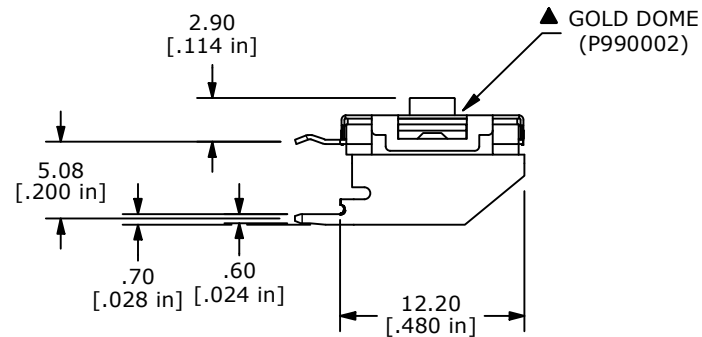
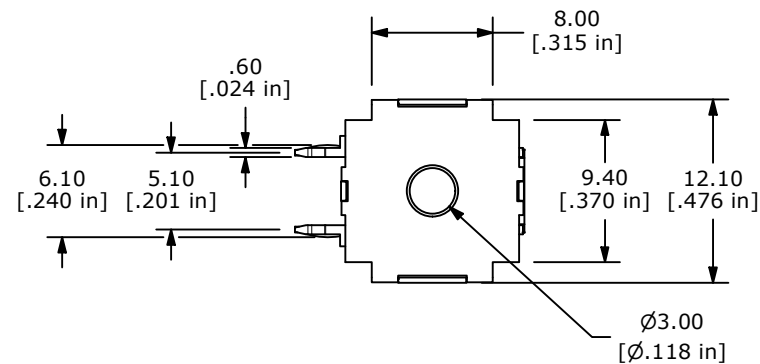
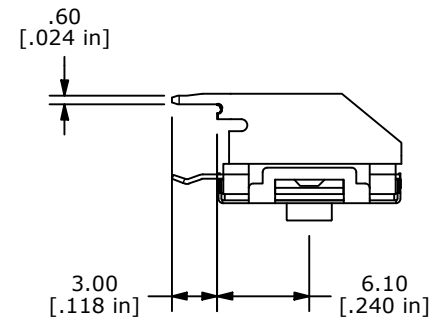


NOTES:

1. ALL DIMENSIONS IN MM [IN].
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲ 4. RATING: 12V, 50mA MAX; 100mV, 10mA MIN
5. OPERATING FORCE: 220 $\pm$ 60 GRAMS
6. TRAVEL: 0.50 $\pm$ 0.20mm
7. CONTACT RESISTANCE: 100 MILLI-OHMS MAX (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE: 100,000 CYCLES MIN
- ▲ 9. CONTACTS: GOLD, 10 MICRO INCHES MIN
10. ▲ DENOTES CRITICAL PARAMETER.
11. OPERATING TEMPERATURE: -40C to +105C
- ▲ 12. PACKAGING: 41 PIECES PER TUBE



J	24746	remove bubble test note	2/18/21	MW
H	23972	drawing update, added 9.40 and 8.00 dim.	7/19/19	MW
G	17671	CHANGED NOTE# 13 & DIM. 5.11 TO 5.08	9/13/07	BF
F	17372	UPDATE DRAWING	6/11/07	TN
E	17179	FIXED MODEL, DIMENSIONS	4/11/07	TN
D	17173	ADDED GOLD DOME NOTE	4/9/07	TN
C	16659	UPDATED PACKAGING "42", NOTES	11/15/2006	TN
B	16146	ADD PACKAGING NOTE	6/14/06	BK
A	16074	RELEASED TO PRODUCTION	5/31/06	BK
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



E-SWITCH®

OBJECT ID
000020142

TITLE TL6190AF220R

SCALE
2:1

DATE
9/13/2007

DR
BF

DWG
P600000

REV
J