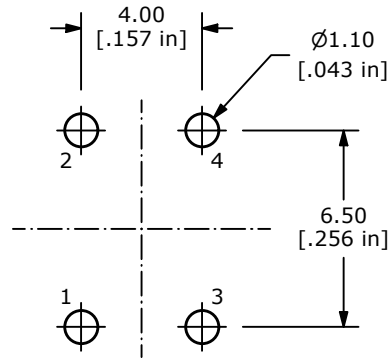





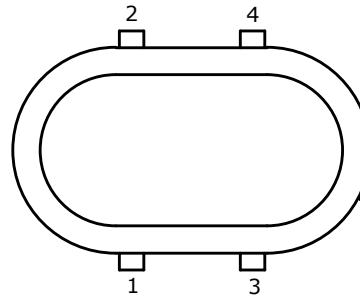
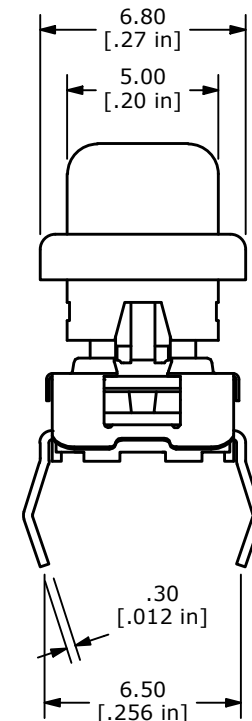
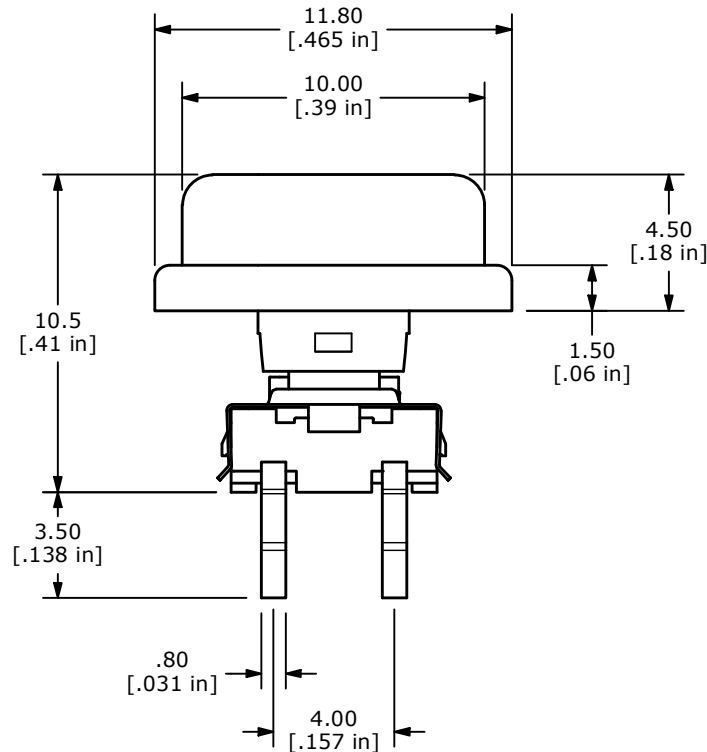
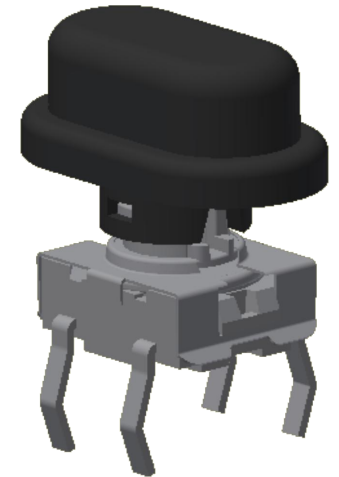
PCB LAYOUT



▲ CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. RATING: 12VDC @ 50mA
4. CONTACT RESISTANCE: 100m Ω MAX.
5. INSULATION RESISTANCE: 100M Ω MIN @ 500VDC
- ▲ 6. OPERATING FORCE: 200 $\pm$ 80gf
7. TRAVEL: 0.45 $\pm$ 0.15mm
8. OPERATING TEMPERATURE: -40°C to 85°C
9. OPERATING LIFE: 500,000 CYCLES
- ▲ 10. LED COLOR: NO LED
11. IP67 RATED
12. ▲ DENOTES CRITICAL PARAMETERS

▲ CAP
COLOR: BLACK

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102743	Release	05/17/24	MW	TITLE TL6215VF200NGK				100127418
					SCALE	DATE	DR	DWG	REV
					4:1	5/15/2024	MW	B200635	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED