
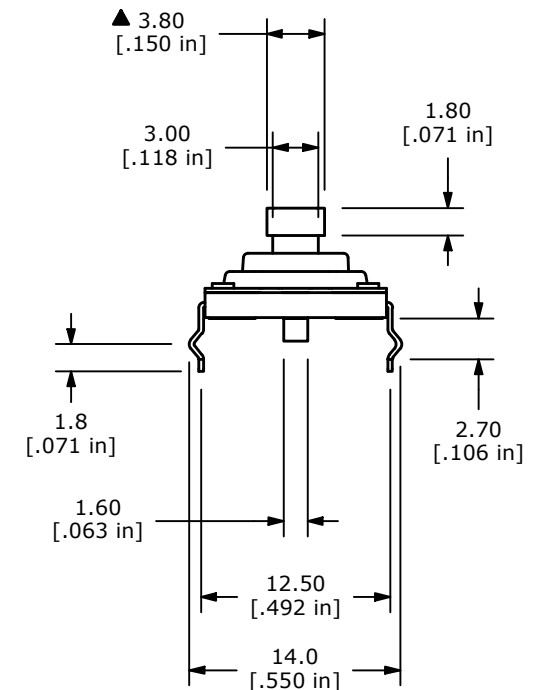


CIRCUIT: SPST
OFF - (ON) ▲

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. CONTACT RATING: 12VDC, 50mA
4. CONTACT RESISTANCE: 100 m Ω MAX.
5. INSULATION RESISTANCE: 1M Ω MIN @ 100VDC.
- ▲ 6. OPERATING FORCE: 260 \pm 70gf
7. TRAVEL: 0.3 +0.2/-0.1mm
8. OPERATING TEMPERATURE: -40°C to +105°C
9. STORAGE TEMPERATURE: -40°C to +105°C
10. OPERATING LIFE: 10,000,000 CYCLES
11. ▲ DENOTES CRITICAL PARAMETERS
12. PART IS IP67 RATED
13. PARTS TO BE PACKAGED 500 PARTS PER BAG.

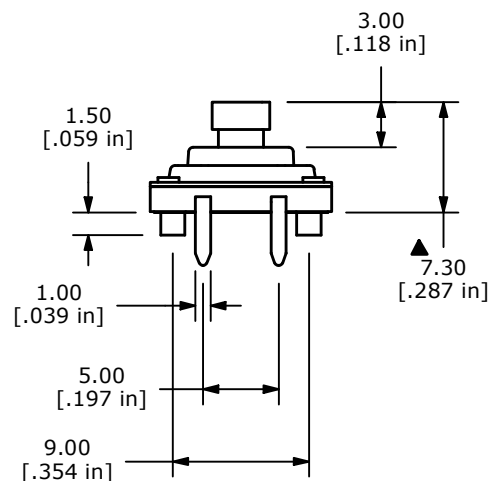

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-102942	NOTES 8 AND 9: 105 WAS 90	08/19/24	JS	TITLE TL6300AF260QP				000017971
					SCALE	DATE	DR	DWG	REV
					2:1	1/21/2019	rc	P010696	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED