
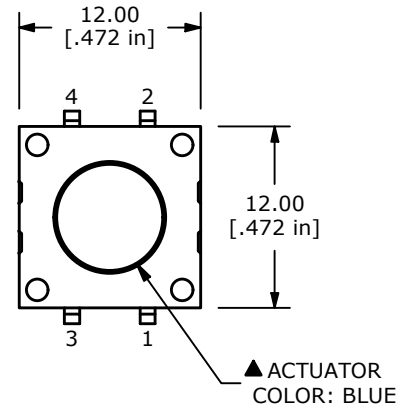
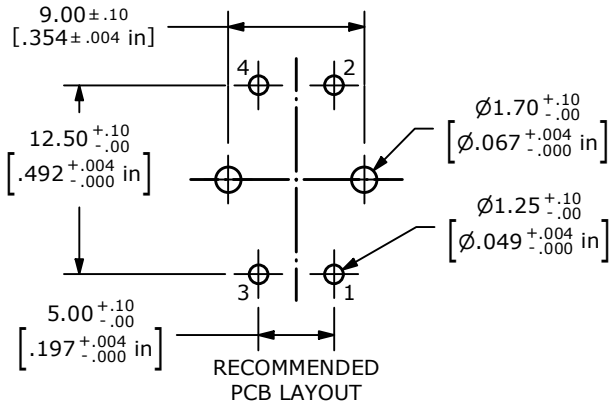
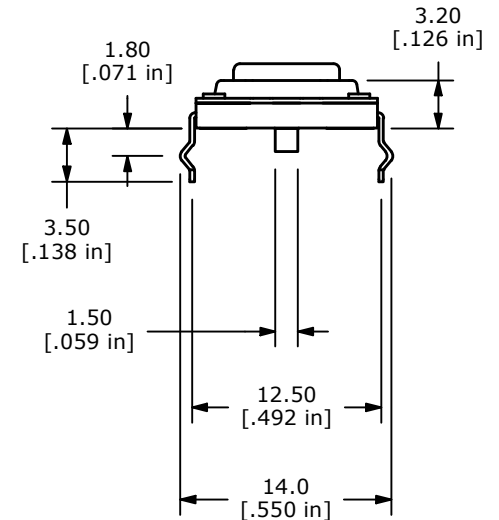


CIRCUIT: SPST
OFF - (ON) ▲

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- CONTACT RATING: 12VDC, 50mA
- CONTACT RESISTANCE: 100 mΩ MAX.
- INSULATION RESISTANCE: 1MΩ MIN @ 100VDC.
- ▲ 6. OPERATING FORCE: 130 ± 30 gf
- TRAVEL: $0.3 + 0.2/-0.1$ mm
- OPERATING TEMPERATURE: -40°C to $+105^{\circ}\text{C}$
- STORAGE TEMPERATURE: -40°C to $+105^{\circ}\text{C}$
- OPERATING LIFE: 10,000,000 CYCLES
- ▲ DENOTES CRITICAL PARAMETERS
- INGRESS PROTECTION: IP67
- PACKAGING: 500pcs BAG.

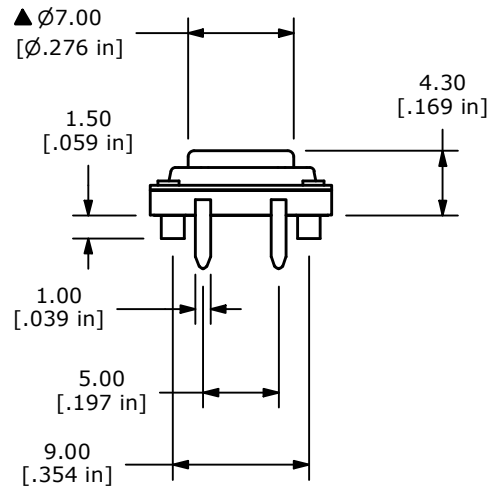

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102870	RELEASE	08/01/24	JS	TITLE TL6300BF130QP				100127870
					SCALE	DATE	DR	DWG	REV
					2:1	7/18/2024	JS	P010715	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED