


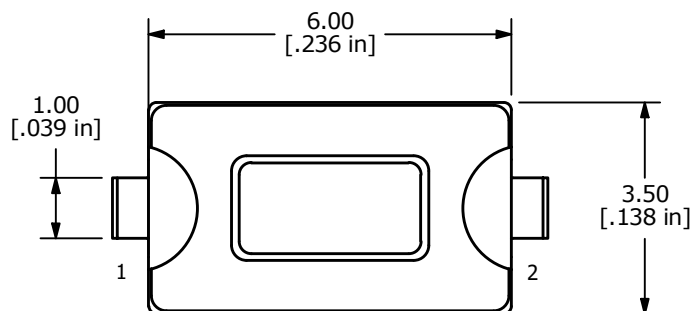

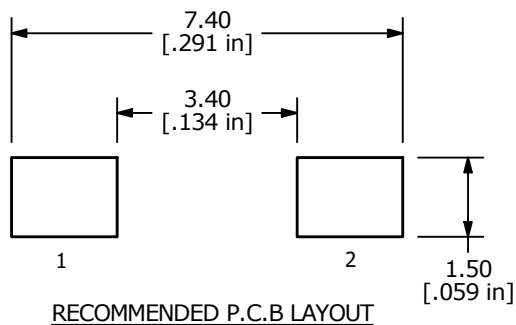


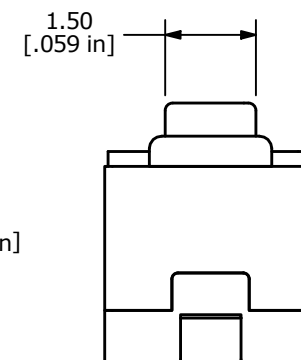

## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=  $\pm 0.4$   
X.XX=  $\pm 0.25$
3. TERMINAL NUMBERS FOR REF. ONLY
4. RATING: 50mA @ 12VDC
- ▲ 5. OPERATING FORCE 260 $\pm$ 70gf
6. DIELECTRIC STRENGTH: 250VAC FOR 1 MINUTE.
7. TRAVEL: 0.15  $\pm$  0.1mm
8. CONTACT RESISTANCE 100m $\Omega$  MAX. (INITIAL)
9. INSULATION RESISTANCE 100M $\Omega$  MIN. @500VDC
10. MECHANICAL/ELECTRICAL LIFE: 30,000 CYCLES
11. BOUNCE: 10msec MAX.
- ▲ 12. CONTACT MATERIAL: SILVER
- ▲ 13. MOISTURE PROTECTION: IP67
14. ▲ DENOTES CRITICAL PARAMETER
15. OPERATING TEMP: -40°C to 85°C
16. PACKAGING: TAPE AND REEL, 1,800 PCS/REEL

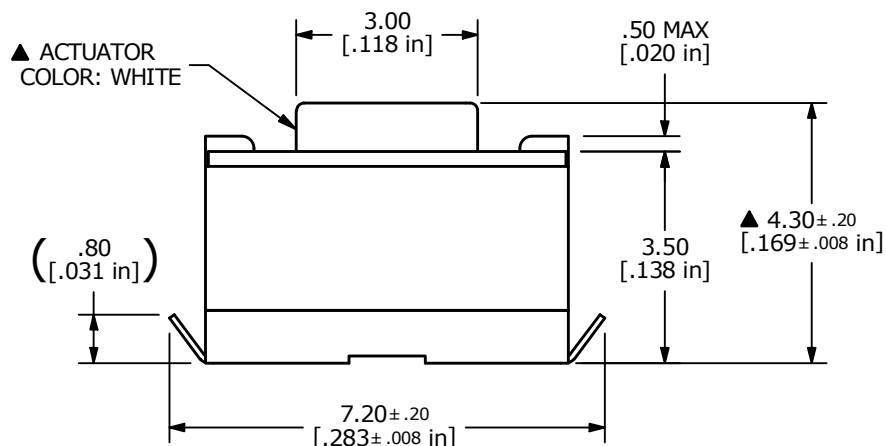

| REV | ECO NO     | DESCRIPTION | DATE     | BY | E-SWITCH®           |           |    |         | OBJECT ID |
|-----|------------|-------------|----------|----|---------------------|-----------|----|---------|-----------|
| A   | ECO-100883 | RELEASE     | 04/05/22 | JS | TITLE TL6400AF260QJ |           |    |         | 100121648 |
|     |            |             |          |    | SCALE               | DATE      | DR | DWG     | REV       |
|     |            |             |          |    | 8:1                 | 3/29/2022 | JS | P170002 | A         |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED