



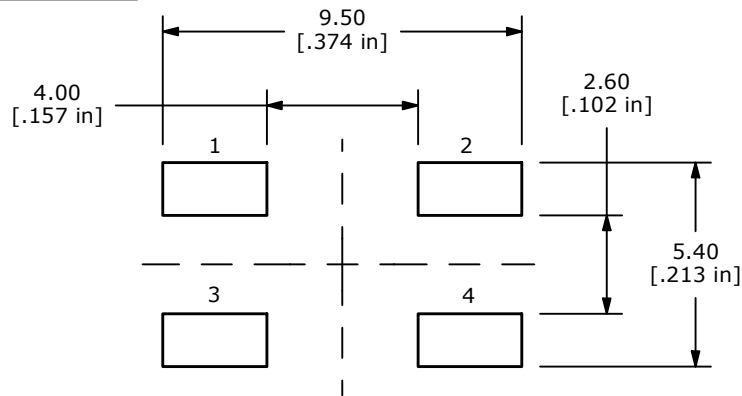





RECOMMENDED P.C.B. LAYOUT



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF. ONLY
4. RATING: 50mA @ 12VDC
- ▲ 5. OPERATING FORCE: 260 ±50gf
6. DIELECTRIC STRENGTH: 250VAC FOR 1 MINUTE
7. TRAVEL: 0.25 ± 0.15mm
8. CONTACT RESISTANCE: 100mΩ MAX. (INITIAL)
9. INSULATION RESISTANCE: 100MΩ MIN. @100VDC
10. MECHANICAL/ELECTRICAL LIFE: 500,000 CYCLES
11. BOUNCE: 10 msec MAX.
- ▲ 12. CONTACT MATERIAL: SILVER
- ▲ 13. INGRESS PROTECTION: IP67
14. ▲ DENOTES CRITICAL PARAMETER
15. OPERATING TEMP: -40°C TO 90°C
16. PACKAGING: TAPE AND REEL 1,500 PCS/REEL

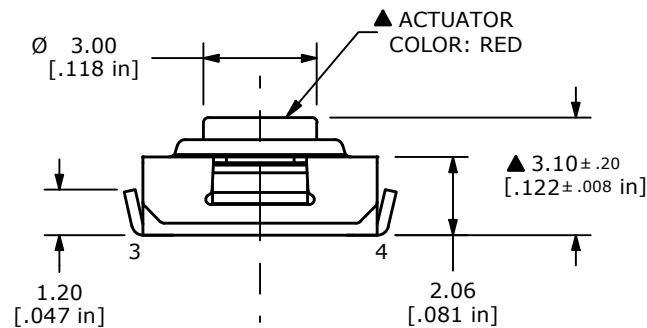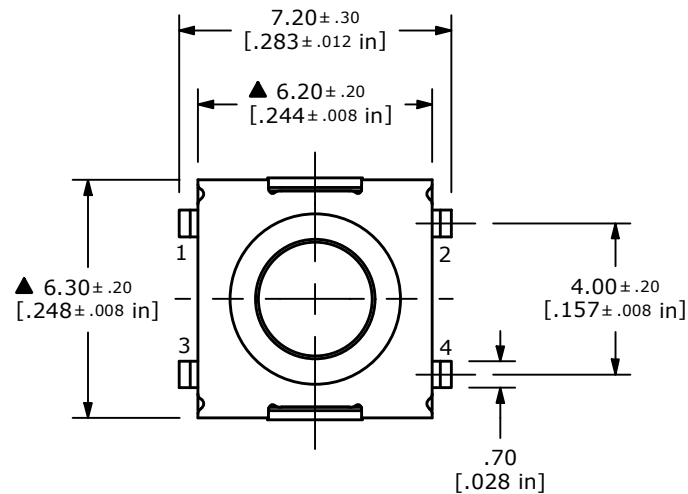

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-100960	RELEASE	05/17/22	MR	TITLE TL6800AF260QJ				100121853
					SCALE	DATE	DR	DWG	REV
					5:1	4/26/2022	JS	P006802	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED