
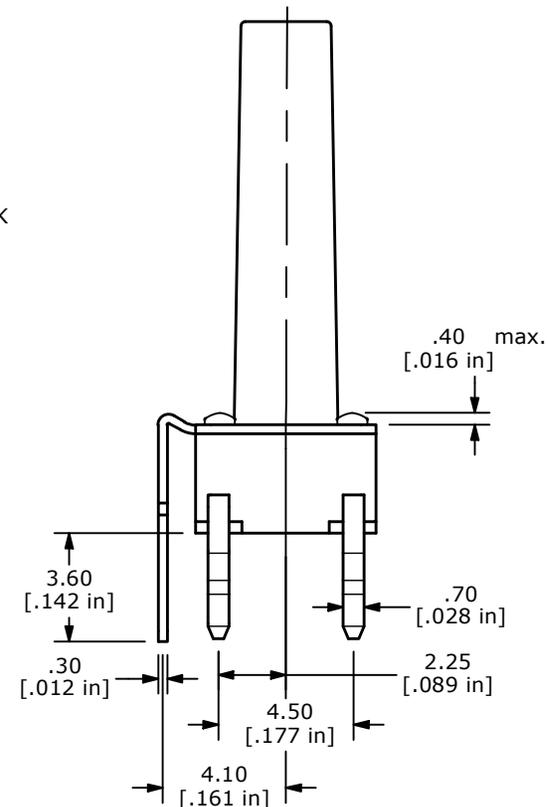
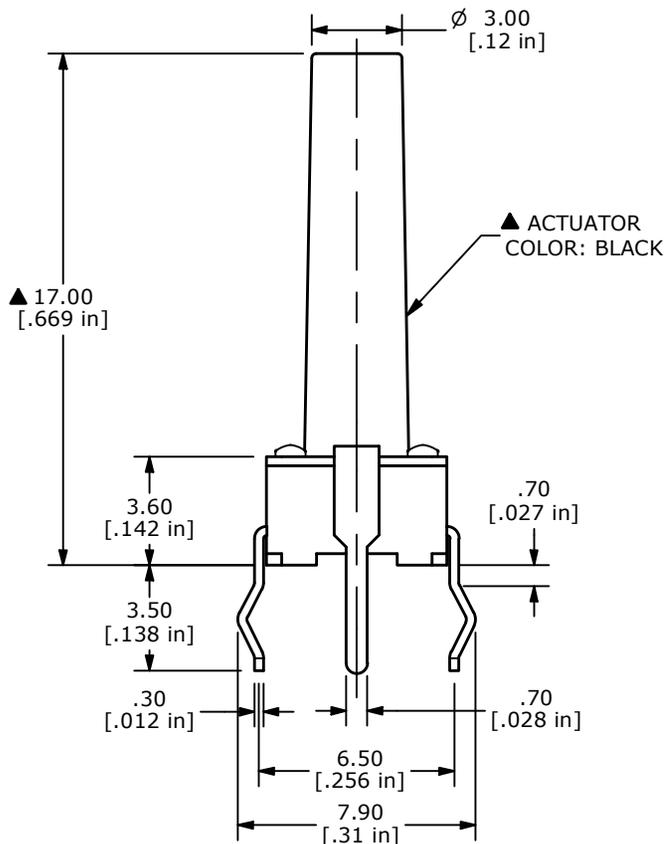


- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
 3. TERM. NUMBERS FOR REF. ONLY.
 4. RATING: 50mA @ 12VDC
 - ▲ 5. OPERATING FORCE: 160 ± 50gf
 6. TRAVEL: 0.25 +0.2/-0.1mm
 7. CONTACT RESISTANCE: 100 mΩ MAX.
 - ▲ 8. CONTACT MATERIAL: SILVER
 9. DIELECTRIC STRENGTH: 250V RMS min.
 10. INSULATION RESISTANCE: 100 MEGAΩ min.
 11. ELECTRICAL LIFE: 100,000 CYCLES
 12. ▲ DENOTES CRITICAL PARAMETER.
 13. OPERATING TEMP: -40°C to 85°C
 14. PACKAGE: POLYBAG / 750 PIECES PER BAG

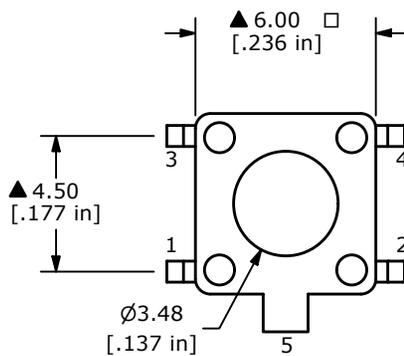

B	24510	CHANGE OPERATING TEMPERATURE	10/6/20	JM
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE TLE1105LF160Q				
SCALE	DATE	DR	DWG	REV
4:1	12/10/1996	MM	P010109	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED