



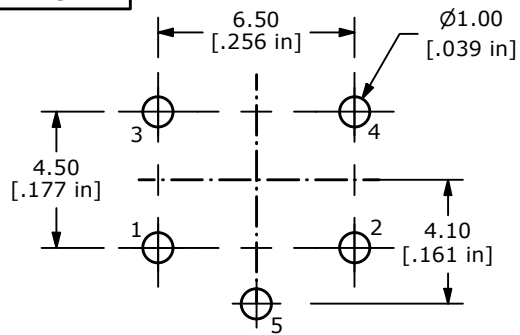





P.C. LAYOUT



CIRCUIT: SPST ▲

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
3. TERM. NUMBERS FOR REF. ONLY.
4. RATING: 50mA @ 12 VDC
- ▲ 5. OPERATING FORCE: 160± 50gf
6. TRAVEL: 0.25 +0.20/-0.10 mm
7. CONTACT RESISTANCE: 100 mΩ MAX.
- ▲ 8. CONTACT MATERIAL: SILVER
9. DIELECTRIC STRENGTH: 250VAC min.
10. INSULATION RESISTANCE: 100 MEGAΩ min.
11. ELECTRICAL LIFE: 100,000 CYCLES
12. ▲ DENOTES CRITICAL PARAMETER.
13. OPERATING TEMP: -40°C TO 85°C
14. PACKAGE: POLYBAG/ 750 PIECES PER BAG

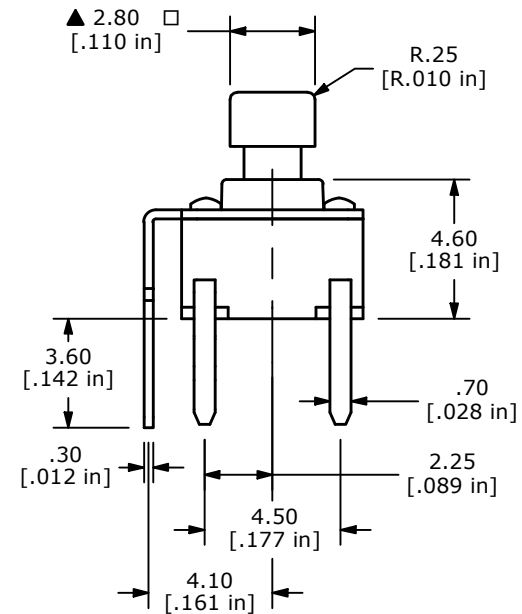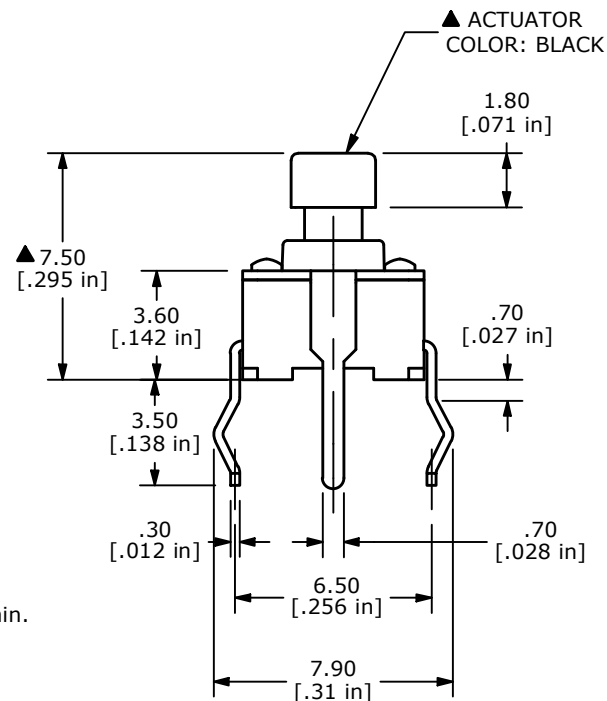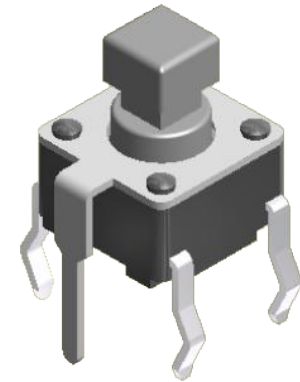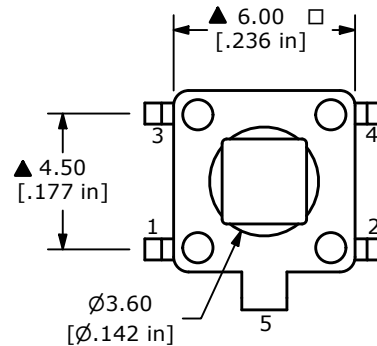

E	24510	CHANGE OPERATING TEMPERATURE	10/6/20	JM
D	16327	RREDRAWN IN INVENTOR FORMAT	8/17/06	BO
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE TLE1105SPF160Q

SCALE 4:1

DATE 8/17/2006

DR BO

DWG P010107

REV E