

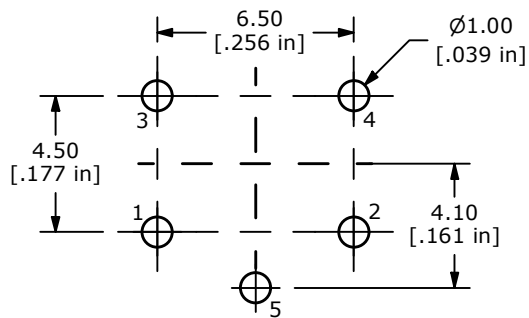



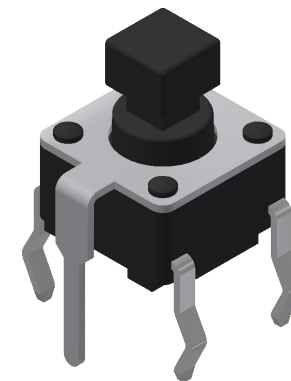



P.C.B LAYOUT

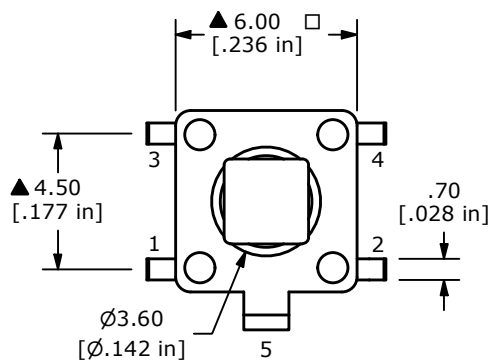

CIRCUIT: SPST ▲

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
3. TERM. NUMBERS FOR REF. ONLY.
4. RATING: 50mA @ 12 VDC
- ▲ 5. OPERATING FORCE: 160 ± 50 gf
6. TRAVEL: $0.25 + 0.20 / - 0.10$ mm
7. CONTACT RESISTANCE: $100\ m\Omega$ MAX.
- ▲ 8. CONTACT MATERIAL: GOLD
9. DIELECTRIC STRENGTH: 250VAC min.
10. INSULATION RESISTANCE: $100\ MEGA\Omega$ min.
11. ELECTRICAL LIFE: 100,000 CYCLES
12. OPERATING TEMP: $-40^{\circ}C$ TO $85^{\circ}C$
13. ▲ DENOTES CRITICAL PARAMETER.
14. PACKAGE: POLYBAG/750 PIECES PER BAG

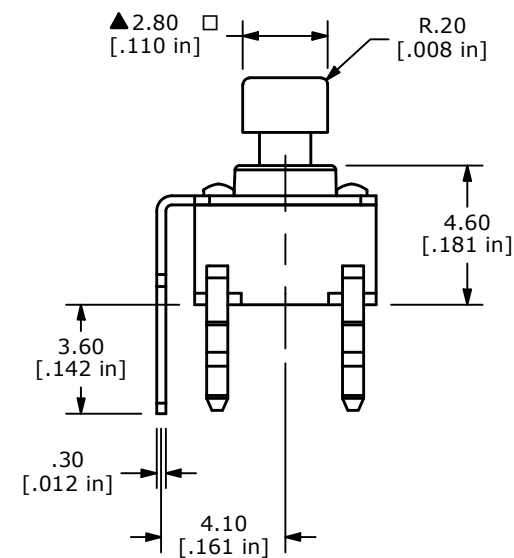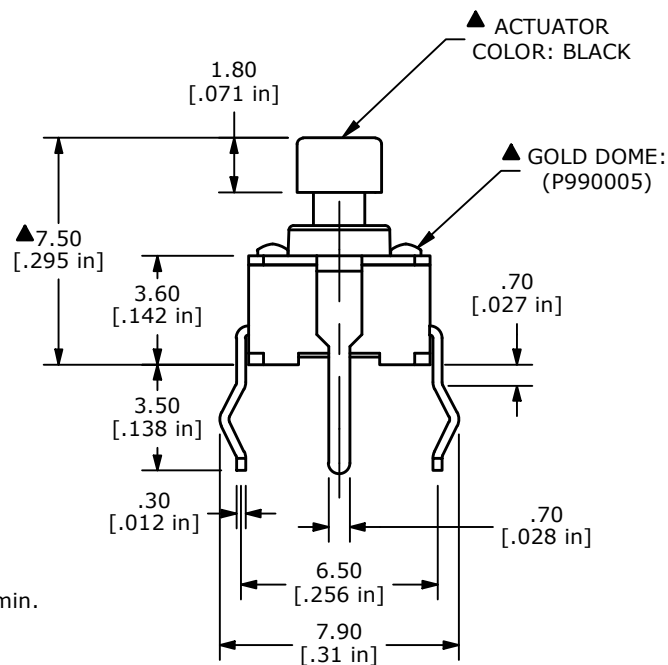

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
C	ECO-102188	PRINT UPDATE	09/01/23	JS						000017693
					TITLE TLE1105SPF160R					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 4:1	DATE 12/22/2006	DR TN	DWG P010124	REV C	