



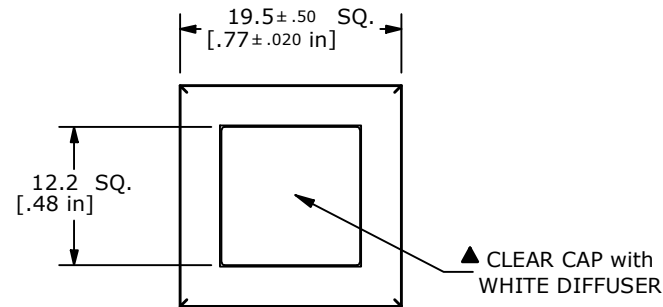
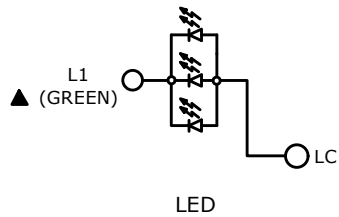


CIRCUIT LAYOUT

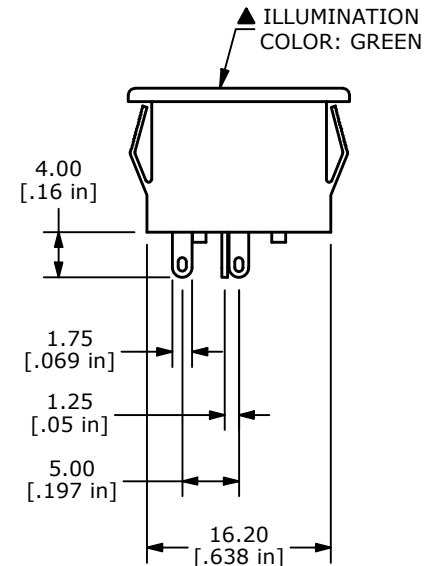


PANEL MOUNTING

PANEL MOUNTING	
PANEL THICK	(W) DIMENSION
0.75 - 1.25	17.6 - 17.8
1.25 - 2.0	17.8 - 18.0
2.0 - 3.0	18.0 - 18.2

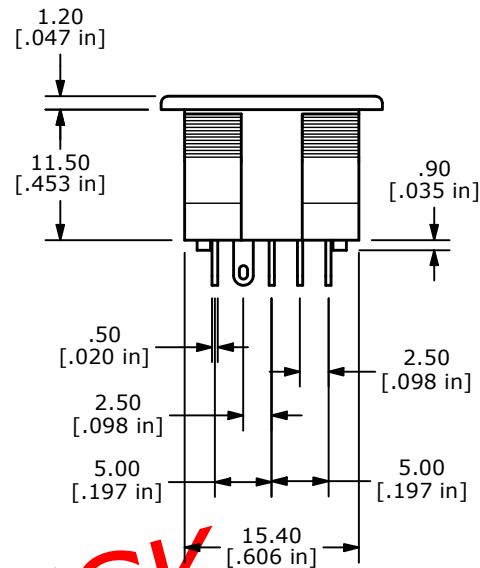

CHECK
AVAILABILITY
ECO-101563

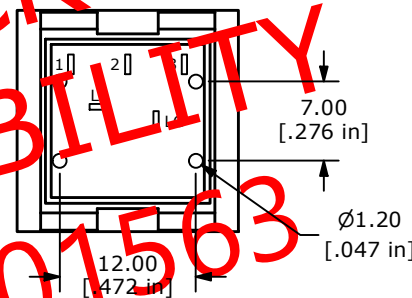

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
4. CONTACT RATING: 0.1A MAX. @ 28VDC
- ▲ 5. CONTACT MATERIAL: GOLD
6. ELECTRICAL LIFE: 200,000 Typical
7. MECHANICAL LIFE: 200,000 CYCLES TYP.
8. CONTACT RESISTANCE: 50 mΩ INITIAL TYP. MAX.
9. DIELECTRIC STRENGTH: 1,000 VAC FOR 1 MIN.
10. TRAVEL TO MAKE: 2.20mm ±0.2
11. OPERATING FORCE: 200 ±100 gf
12. OPERATING TEMPERATURE: -40° to +85°C
13. ▲ DENOTES CRITICAL PARAMETER
- ▲ 14. LED COLOR: GREEN: 3 CHIPS; 2.1VDC @20mA TYP.

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-101563	DIM 19.5+/- .50 WAS 19.50	03/13/23	MR	TITLE ULP12EEM1RPMCL1GRNNIL				000006896
					SCALE	DATE	DR	DWG	REV
					3:2	2/13/2018	MW	B800081	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED