





SWITCH
SCHEMATIC

CIRCUIT LAYOUT


▲ CLEAR CAP with
WHITE DIFFUSER

PCB MOUNTING

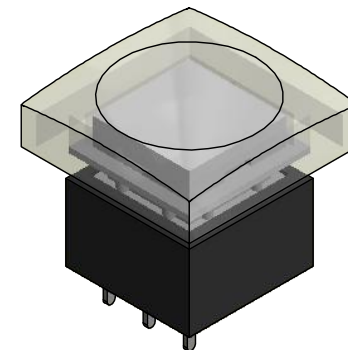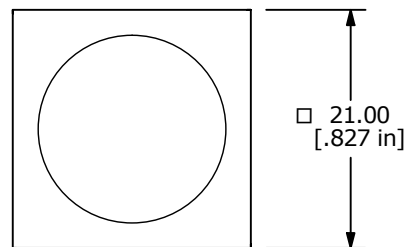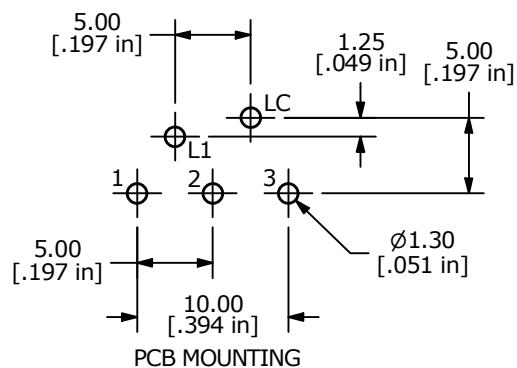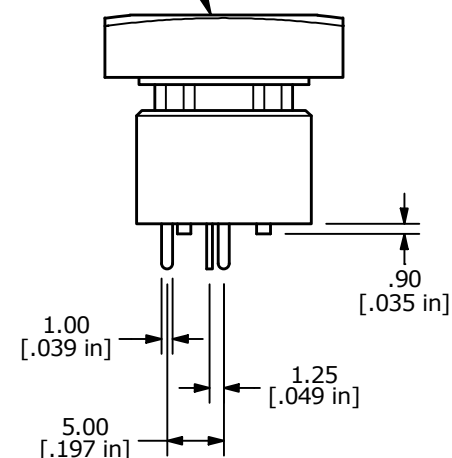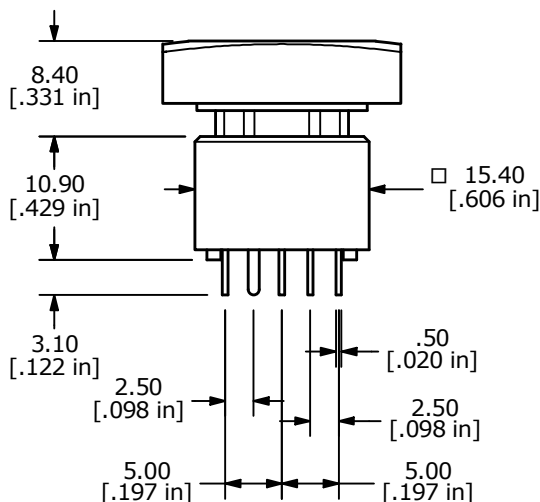

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATING: 0.1A MAX. @ 28VDC
- ▲ 5. CONTACT MATERIAL: SILVER
6. ELECTRICAL LIFE: 200,000 Typical
7. OPERATIONAL LIFE: 200,000 CYCLES TYP.
8. OPERATING TEMP: -40°C to +85°C
9. OPERATING FORCE: 200 $\pm$ 100gf
10. CONTACT RESISTANCE: 50 MILLI-OHM INITIAL TYP. MAX.
11. DIELECTRIC STRENGTH: 1000 VAC FOR 1 MINUTE
12. TRAVEL TO MAKE: 2.20mm $\pm$ 0.2mm
14. ▲ DENOTES CRITICAL PARAMETER
- ▲ 15. LED COLOR: GREEN: 3 CHIPS; 2.1VDC, @20mA TYP.



TITLE ULP12EEP1QLSCL1GRNNIL

A	24722	RELEASE	2/3/21	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 3:2	DATE 2/3/2021	DR MW	DWG B800087	REV A
--------------	------------------	----------	----------------	----------