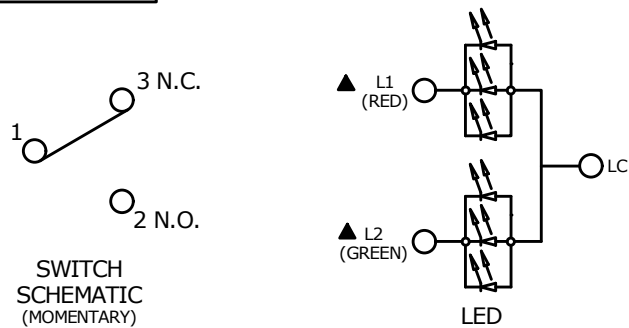


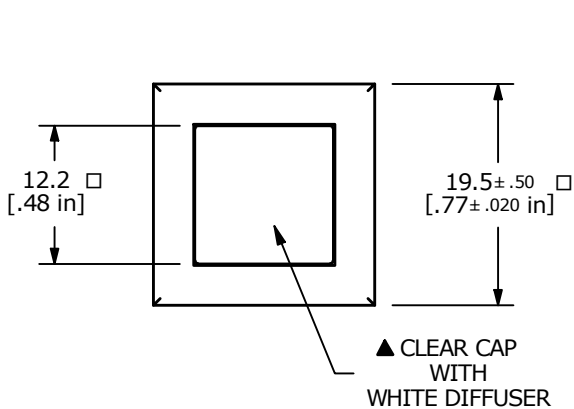

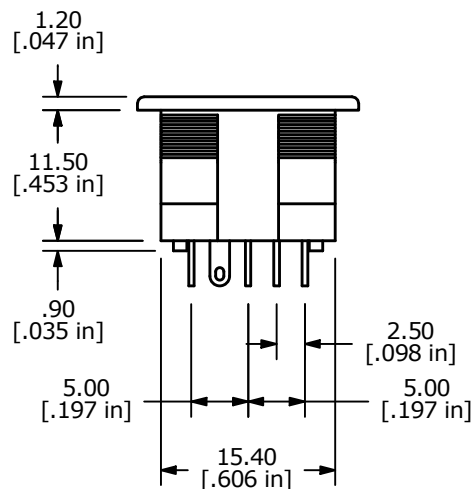
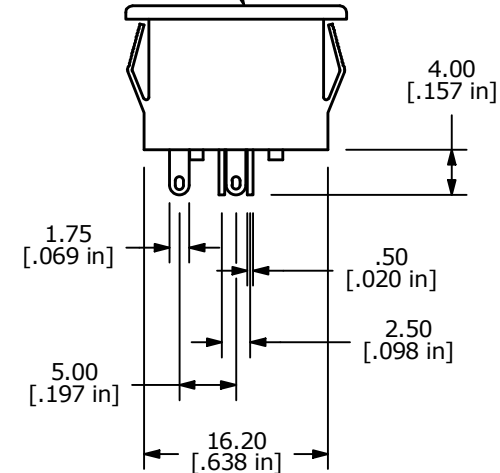


▲ CIRCUIT LAYOUT▲ PANEL MOUNTING

PANEL MOUNTING	
PANEL THICK	W
0.75 - 1.25	17.6 - 17.8
1.25 - 2.0	17.8 - 18.0
2.0 - 3.0	18.0 - 18.2

NOTES:

- ALL DIMENSIONS IN MM
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REFERENCE ONLY.
- CONTACT RATING: 0.1A MAX. @ 28V
- CONTACT MATERIAL: GOLD
- ELECTRICAL LIFE: 200,000 Typical
- MECHANICAL LIFE:
1,000,000 CYCLES TYP.
- CONTACT RESISTANCE: 100 MILLI OHM MAX.
- DIELECTRIC STRENGTH:
1000 VAC FOR 1 MIN.
- TRAVEL TO MAKE: 2.20mm ±0.2
- OPERATING FORCE: 200 +/- 100 gf
- OPERATING TEMPERATURE: -40° to +85°C
- ▲ DENOTES CRITICAL PARAMETER
- LED COLOR: RED: 3 CHIPS; 1.95-2.5 VDC @20mA TYP.
GRN: 3 CHIPS; 2.1-2.5 VDC @20mA TYP.

▲ ILLUMINATION
COLOR: RED/GREEN

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
F	ECO-101562	DIM 19.5+/- .50 WAS 19.50	02/22/23	JS	TITLE ULP12OAM1RPMCL1REDGRN				000006908
					SCALE	DATE	DR	DWG	REV
					3:2	10/1/2009	BLR	B810034	F

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED