




▲ CIRCUIT LAYOUT

▲ CLEAR CAP with WHITE DIFFUSER

PANEL MOUNTING


PANEL MOUNTING	
PANEL THICK	(W) DIMENSION
0.75 - 1.25	17.6 - 17.8
1.25 - 2.0	17.8 - 18.0
2.0 - 3.0	18.0 - 18.2

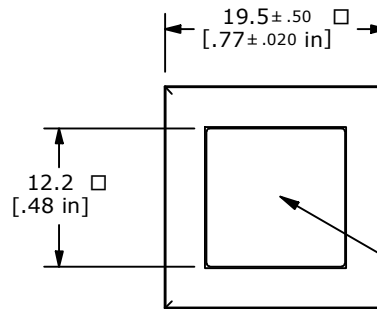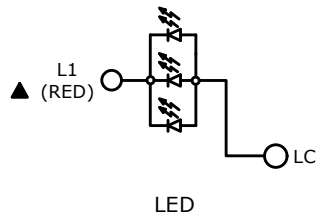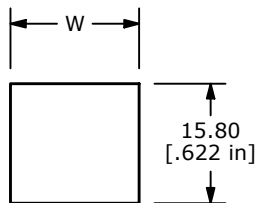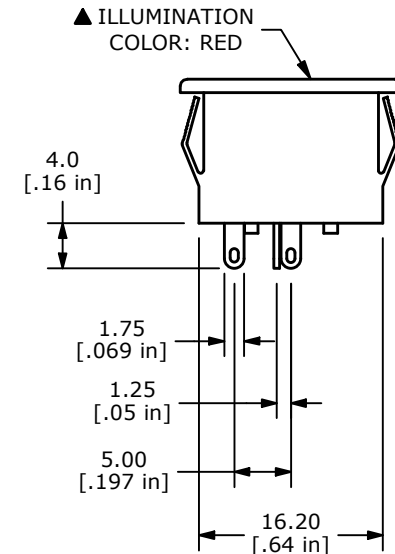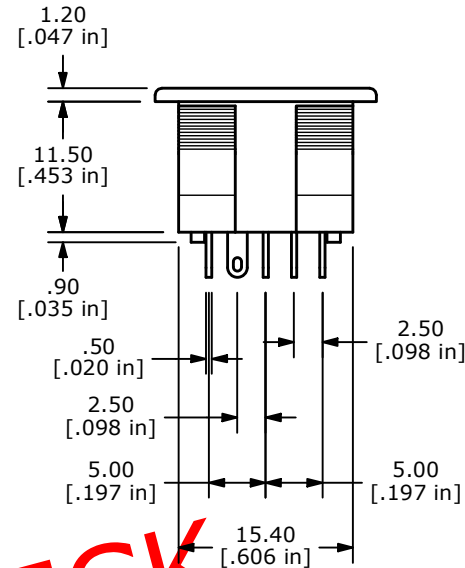

▲ ILLUMINATION COLOR: RED

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
4. CONTACT RATING: 0.1A MAX. @ 28VDC
- ▲ 5. CONTACT MATERIAL: GOLD
6. ELECTRICAL LIFE: 200,000 Typical
7. MECHANICAL LIFE: 200,000 CYCLES TYP.
8. CONTACT RESISTANCE: 100m Ω INITIAL TYP. MAX.
9. DIELECTRIC STRENGTH: 1,000 VAC FOR 1 MIN.
10. TRAVEL TO MAKE: 2.20mm ± 0.2 mm
11. OPERATING FORCE: 200 ± 100 gf
12. OPERATING TEMPERATURE: -40° to +85°C
13. ▲ DENOTES CRITICAL PARAMETER
- ▲ 14. LED COLOR: RED: 3 CHIPS; 1.95VDC @ 20mA TYP.

CHECK
AVAILABILITY
ECO-101563

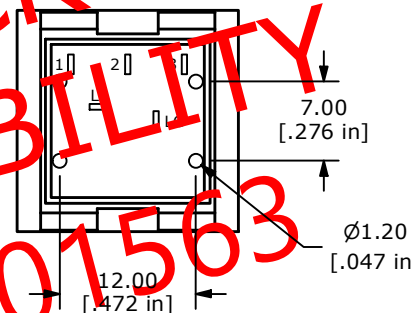

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-101563	DIM 19.5+/- .50 WAS 19.50	03/13/23	MR	TITLE ULP12OAM1RPMCL1REDNIL				000006901
					SCALE	DATE	DR	DWG	REV
					3:2	7/28/2020	MW	B800086	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED