

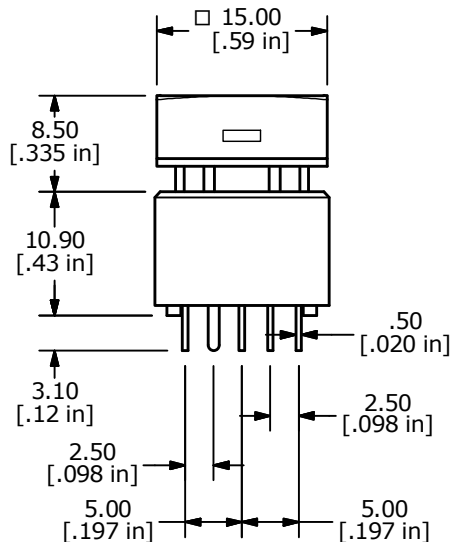
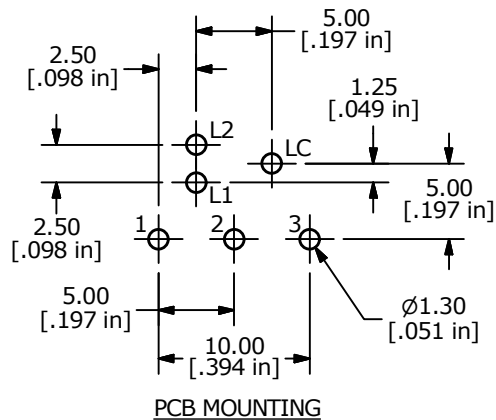


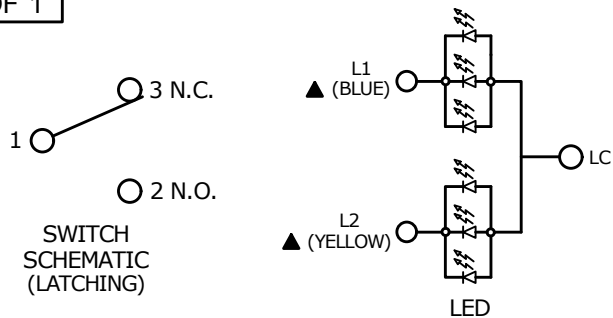




▲ CLEAR CAP with
WHITE DIFFUSER

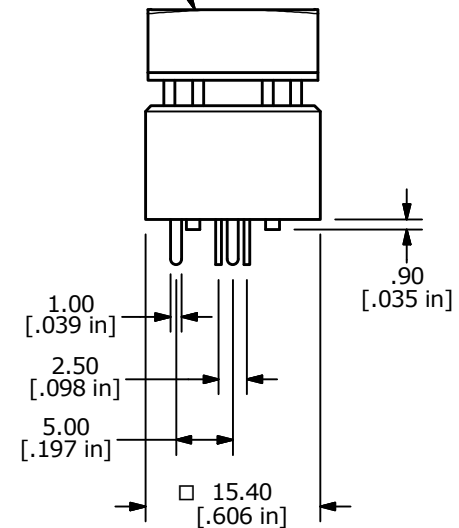

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
- ▲ 4. CONTACT RATING: 0.1A MAX. @ 28VDC
5. CONTACT MATERIAL: GOLD
6. ELECTRICAL LIFE: 200,000 Typical
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
8. OPERATING TEMP: -40°C to $+85^{\circ}\text{C}$
9. OPERATING FORCE: 200 ± 100 gf
10. CONTACT RESISTANCE: 100m Ω MAX.
11. DIELECTRIC STRENGTH: 1000 VAC FOR 1 MINUTE
12. TRAVEL TO MAKE: 2.20mm ± 0.2
13. 2011/65/EU (ROHS) COMPLIANT
14. ▲ DENOTES CRITICAL PARAMETER
- ▲ 15. LED COLOR: BLUE: 3 CHIPS; 3.5VDC, @20mA TYP.
YELLOW: 3 CHIPS; 2.1VDC, @20mA TYP.



E-SWITCH®

A	23299	RELEASE	4/11/18	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE ULP12OAP1RSSCL1BLUYEL

SCALE 3:2

DATE 4/9/2018

DR MW

DWG B800082

REV A