

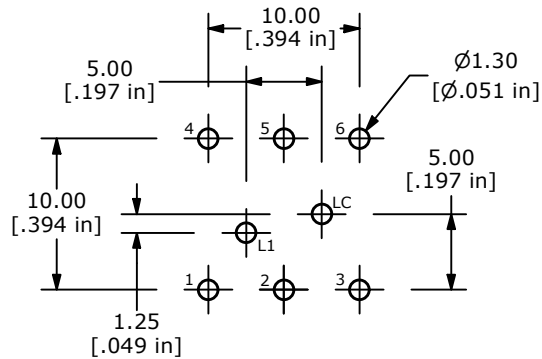

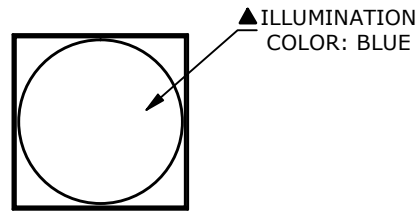



SWITCH SCHEMATIC
(MOMENTARY)

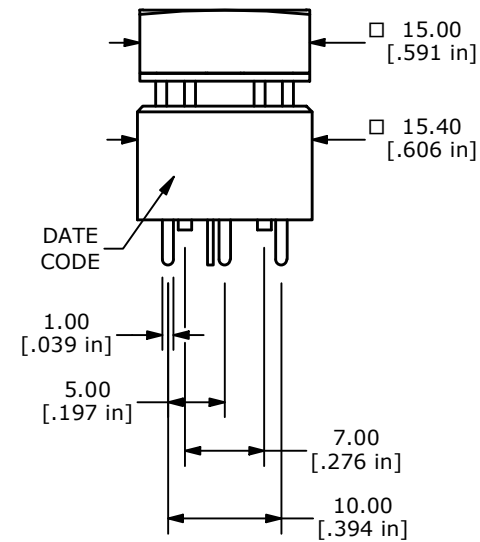

PCB MOUNTING

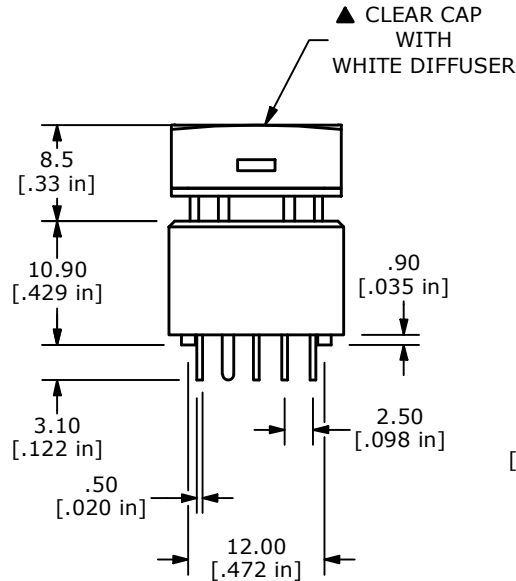

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATING: 0.5A @ 100 VAC OR 25 VDC
0.2A @ 250 VAC
- ▲ 5. CONTACT MATERIAL: SILVER
6. ELECTRICAL LIFE: 200,000 Typical
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
8. OPERATING TEMP: -40°C to +85°C
9. OPERATING FORCE: 300 $\pm$ 150 gf
10. CONTACT RESISTANCE: 50 MILLI-OHM INITIAL TYP. MAX.
11. DIELECTRIC STRENGTH: 1000 VAC FOR 1 MINUTE
12. TRAVEL TO MAKE: 2.20mm $\pm$ 0.2
13. ▲ DENOTES CRITICAL PARAMETER
- ▲ 14. LED COLOR: BLU: 1 CHIP, 2.8-4.0 VDC@20mA

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102474	RELEASE	01/22/24	JS	TITLE ULP22OAP1QSSCL1BLUNIL				100126592
					SCALE	DATE	DR	DWG	REV
					3:2	1/10/2024	JS	B800089	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED