


NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 3A 250 VAC cUL
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. MECHANICAL LIFE: 500,000 CYCLES.
8. INSULATION RESISTANCE: 1,000 M Ω @ 500VDC MIN.
9. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
10. CONTACT RESISTANCE: 50m Ω MAX. @ 1A 12VDC
11. OPERATING TEMP.: -20°C to 55°C
12. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 13. LAMP VOLTAGE: 20mA 110V
14. TRAVEL: 3.2mm
15. ACTUATION FORCE: 3.5 $\pm$ 1.0 N
16. MOUNTING NUT TORQUE: 5-14 Nm
17. INGRESS PROTECTION: IP67
18. HARDWARE SUPPLIED: O-RING AND HEXNUT


17.60^{+0.20}_{-.00}
[.69^{+0.008}_{-.000} in]



PANEL CUT-OUT
PANEL THICKNESS 1-10mm

Ø19.00^{+0.20}_{-.00}
[Ø.748^{+0.008}_{-.000} in]

Ø15.50
[.61 in]



Ø22.00
[.87 in]

▲ POWER SYMBOL
ILLUMINATION
COLOR: RED

▲ ACTUATOR
BLACK ANODIZED



2.0
[.08 in]

▲ HOUSING
BLACK ANODIZED



17.50 FLATS
[.69 in]

M19 x 1.0
THREAD

.50
[.02 in]

5.50
[.22 in]

13.00
[.51 in]

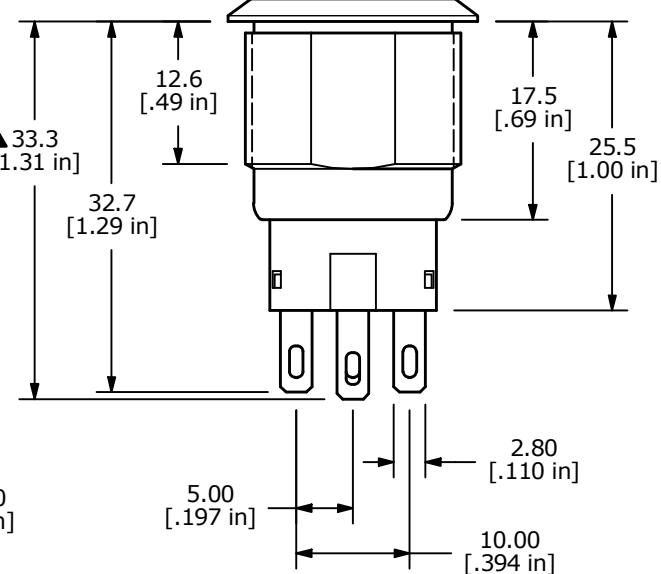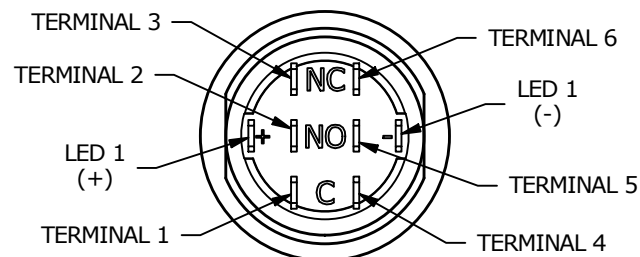

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-100350	UPDATE PANEL CUTOOUT	12/09/21	JS	TITLE ULV4F2G11516				000026093
					SCALE	DATE	DR	DWG	REV
					3:2	2/13/2017	MW	T940093	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED