

▲ SCHEMATIC

ON - (ON)

DPDT ILLUMINATED

() DENOTES MOMENTARY FUNCTION

NOTE:

1. ALL DIMENSIONS IN MM [INCH]

2. GENERAL TOLERANCE: X.X = ± 0.4

X.XX = ± 0.25

3. TERMINAL NUMBERS FOR REF ONLY

▲ 4. CONTACT MATERIAL: SILVER

5. RATING: 3A 250 VAC cUL

6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.

7. MECHANICAL LIFE: 1,000,000 CYCLES.

8. INSULATION RESISTANCE: 1,000 M Ω @ 500VDC MIN.

9. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE

10. CONTACT RESISTANCE: 50m Ω MAX. @ 1A 12VDC

11. OPERATING TEMP: -20°C to 55°C

12. ▲ DENOTES CRITICAL PARAMETER.

▲ 13. LAMP VOLTAGE: 12V


14. TRAVEL: 3.2mm

15. ACTUATION FORCE: 3.5 $\pm$ 1.0 N


16. MOUNTING NUT TORQUE: 5-14 Nm

17. INGRESS PROTECTION: IP67, IK10

18. HARDWARE SUPPLIED: O-RING and HEXNUT

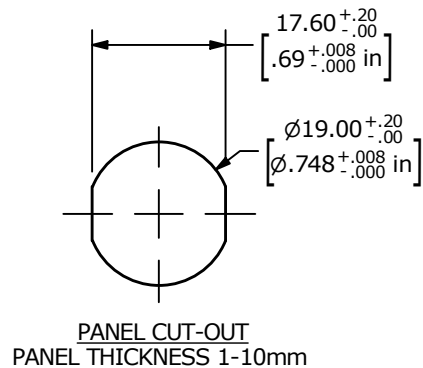





PANEL CUT-OUT
PANEL THICKNESS 1-10mm

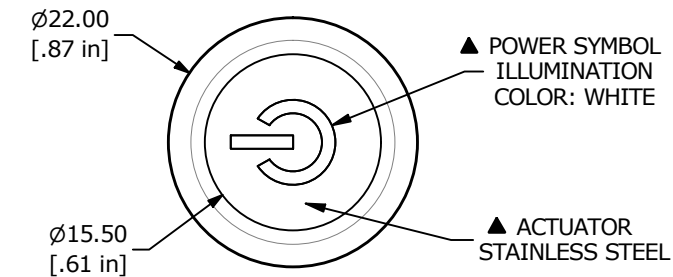

▲ POWER SYMBOL
ILLUMINATION
COLOR: WHITE

▲ ACTUATOR
STAINLESS STEEL

▲ HOUSING
STAINLESS STEEL

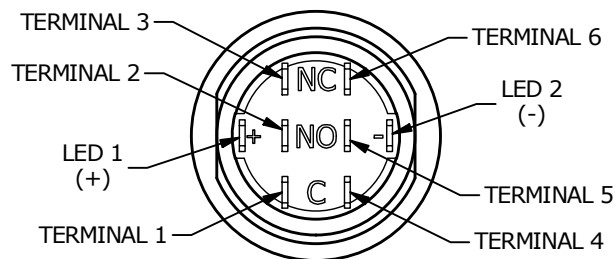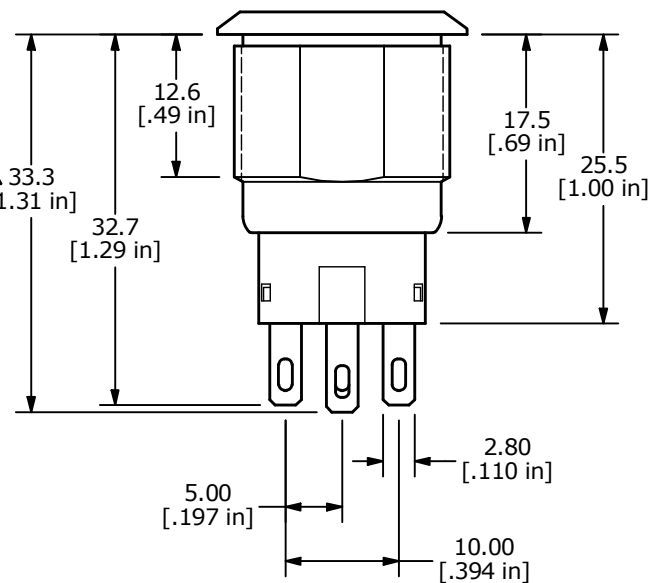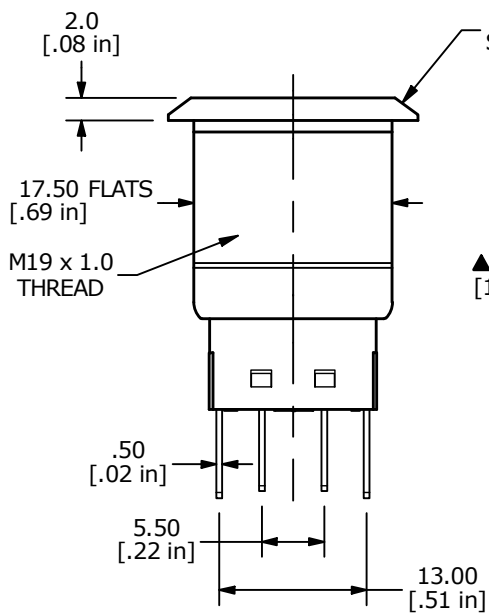

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-100360	UPDATE PANEL CUTOOUT	12/10/21	JS	TITLE ULV4F2HSS504				000026147
					SCALE	DATE	DR	DWG	REV
					3:2	5/12/2020	MW	T940147	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED