



O.P. (MM)	F.P. (MM)
10.5±0.3	11.5 MAX

O.P. = OPERATING POINT
F.P. = FREE-POSITION



NOTES:



- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- RATING: .1A @125VAC; 2A @ 12VDC;
0.5A @ 42VDC; 1A @ 24VDC;
UL, CUL APPROVED
- ▲ 4. OPERATING FORCE: 70±30 GRAMS.
- OPERATING TEMP: -25°C TO 85°C
- ELECTRICAL LIFE: 10,000 CYCLES MIN.
- MECHANICAL LIFE: 1,000,000 CYCLES TYP.
- INSULATION RESISTANCE: >100 MEGA-OHMS @ 500VDC
- DIELECTRIC STRENGTH: 600VAC
- CONTACT RESISTANCE: 100 MILLI-OHMS MAX (INITIAL).
- 2011/65/EC (ROHS) COMPLIANT.
- ▲ DENOTES CRITICAL PARAMETER.
- ACTUATION BELOW THE 2.6mm ACTUATION LIMIT MAY CAUSE DAMAGE TO THE INTERNAL CONTACTS.



5.30
[.209 in]

3.00
[.118 in]

.50
[.020 in]

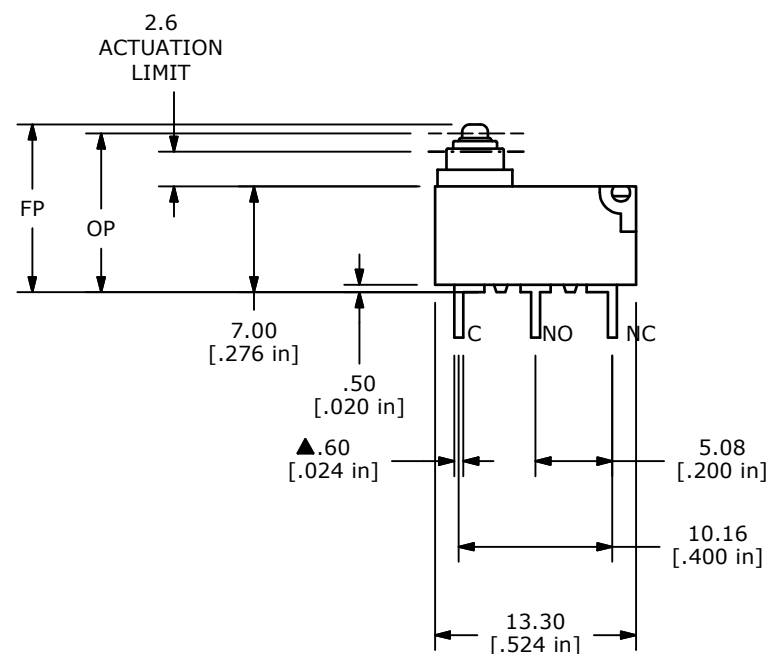

TITLE WS0850100F070PA

A	22608	New Release	11/30/16	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE
2:1DATE
8/17/2016DR
rcDWG
Q930004REV
A