



O.P. (MM)	F.P. (MM)
9.4 ±0.8	11.0 MAX

O.P. = OPERATING POINT
F.P. = FREE-POSITION

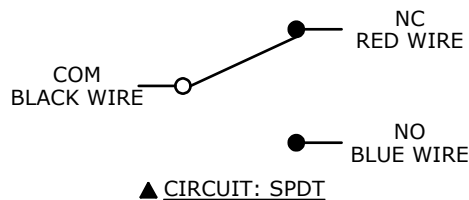

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATING: .1A @125VAC; 2A @ 12VDC;
0.5A @ 42VDC; 1A @ 24VDC;
UL, CUL APPROVED
- ▲ 4. OPERATING FORCE: 50 +10/-30 GRAMS.
5. OPERATING TEMP: -25°C TO 85°C
6. ELECTRICAL LIFE: 10,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
8. INSULATION RESISTANCE: >100 MEGA-OHMS @ 500VDC
9. DIELECTRIC STRENGTH: 600VAC
10. CONTACT RESISTANCE: 100 MILLI-OHMS MAX (INITIAL).
11. WIRES ARE 22AWG, STRANDED, UL1007, COLOR AS NOTED
12. 2011/65/EC (ROHS) COMPLIANT.
13. ▲ DENOTES CRITICAL PARAMETER.
14. ACTUATION BELOW THE 7.8mm ACTUATION LIMIT MAY CAUSE DAMAGE TO THE INTERNAL CONTACTS.

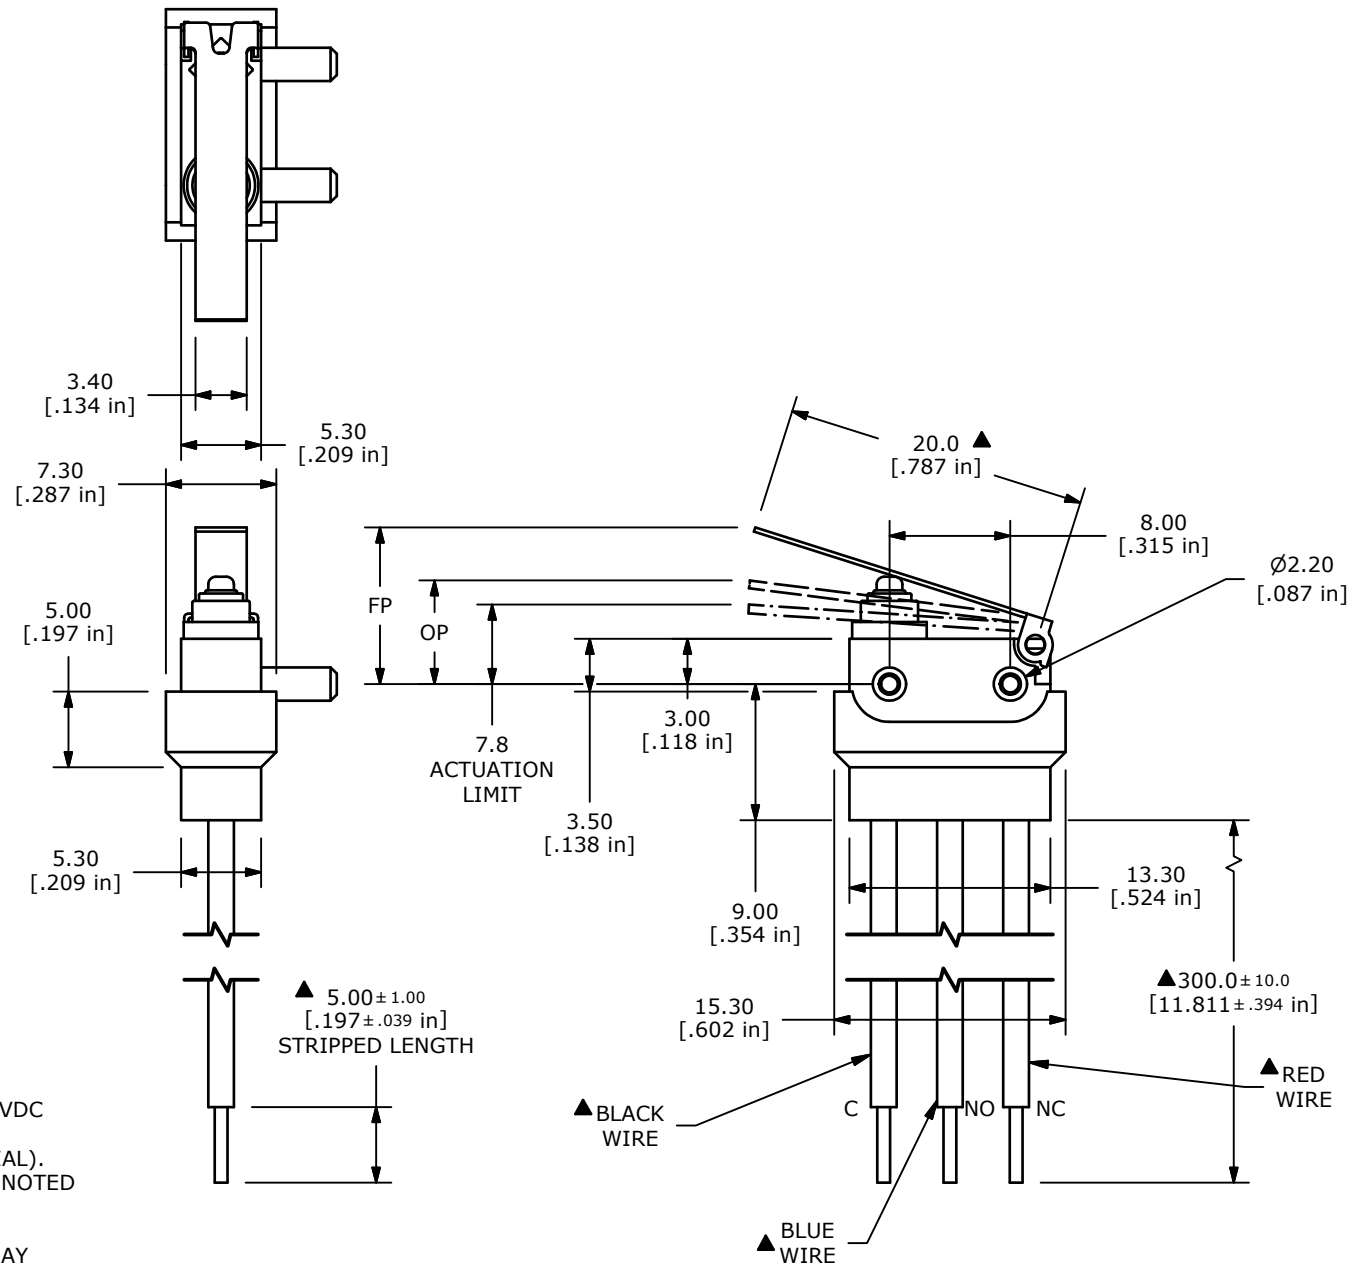

B	22783	Update of wire cover	3/28/17	rc
A	22608	New Release	11/30/16	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE WS0850101F050WA

SCALE 2:1	DATE 8/17/2016	DR rc	DWG Q930003	REV B
--------------	-------------------	----------	----------------	----------