


O.P. (MM)	F.P. (MM)
6.40~6.95	7.35 MAX




O.P. = OPERATING POINT
F.P. = FREE-POSITION



▲ CIRCUIT: SPDT

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- RATING: 0.1A @ 48VDC OR 0.1A @ 125VAC, 250VAC
- CONTACT RESISTANCE: 150mΩ MAX.
- INSULATION RESISTANCE: 100MΩ @ 500VDC
- DIELECTRIC STRENGTH: 500VAC FOR 1 MINUTE
- ELECTRICAL LIFE: 100,000 CYCLES MIN.
- MECHANICAL LIFE: 500,000 CYCLES MIN.
- OPERATING TEMP: -40°C TO 85°C
- MOISTURE PROTECTION: IP67
- OPERATING FORCE: 130 gf MAX.
- ▲ DENOTES CRITICAL PARAMETER.

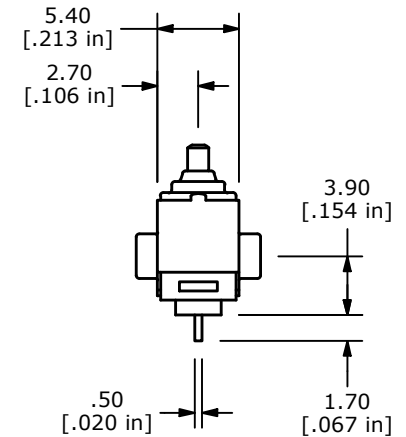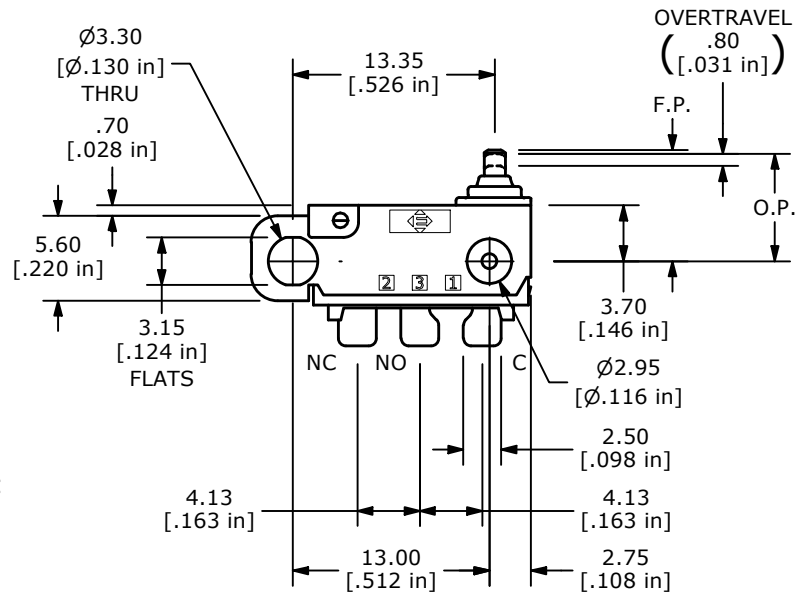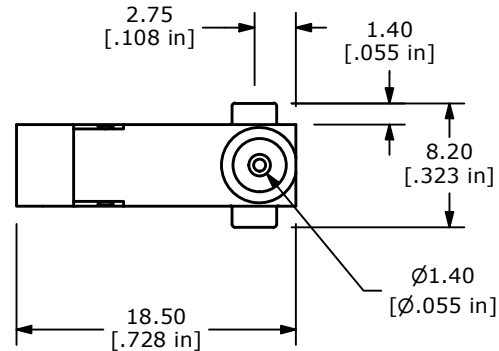

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-100685	NEW RELEASE	03/14/22	MR	TITLE WS10850100F130SA				100120855
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					2:1	1/24/2022	MJR	N010500	A