


O.P. (MM)	F.P. (MM)
8.10~8.70	9.30 MAX


O.P. = OPERATING POINT
F.P. = FREE-POSITION



▲ CIRCUIT: SPDT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATING: 2A @ 30VDC OR 250VAC
4. CONTACT RESISTANCE: 50mΩ MAX.
5. INSULATION RESISTANCE: 100MΩ @ 500VDC
6. DIELECTRIC STRENGTH: 500VAC FOR 1 MINUTE
7. ELECTRICAL LIFE: 100,000 CYCLES MIN.
8. MECHANICAL LIFE: 500,000 CYCLES MIN.
9. OPERATING TEMP: -25°C TO 85°C
10. MOISTURE PROTECTION: IP67
11. OPERATING FORCE: 183 gf MAX.
12. ▲ DENOTES CRITICAL PARAMETER.

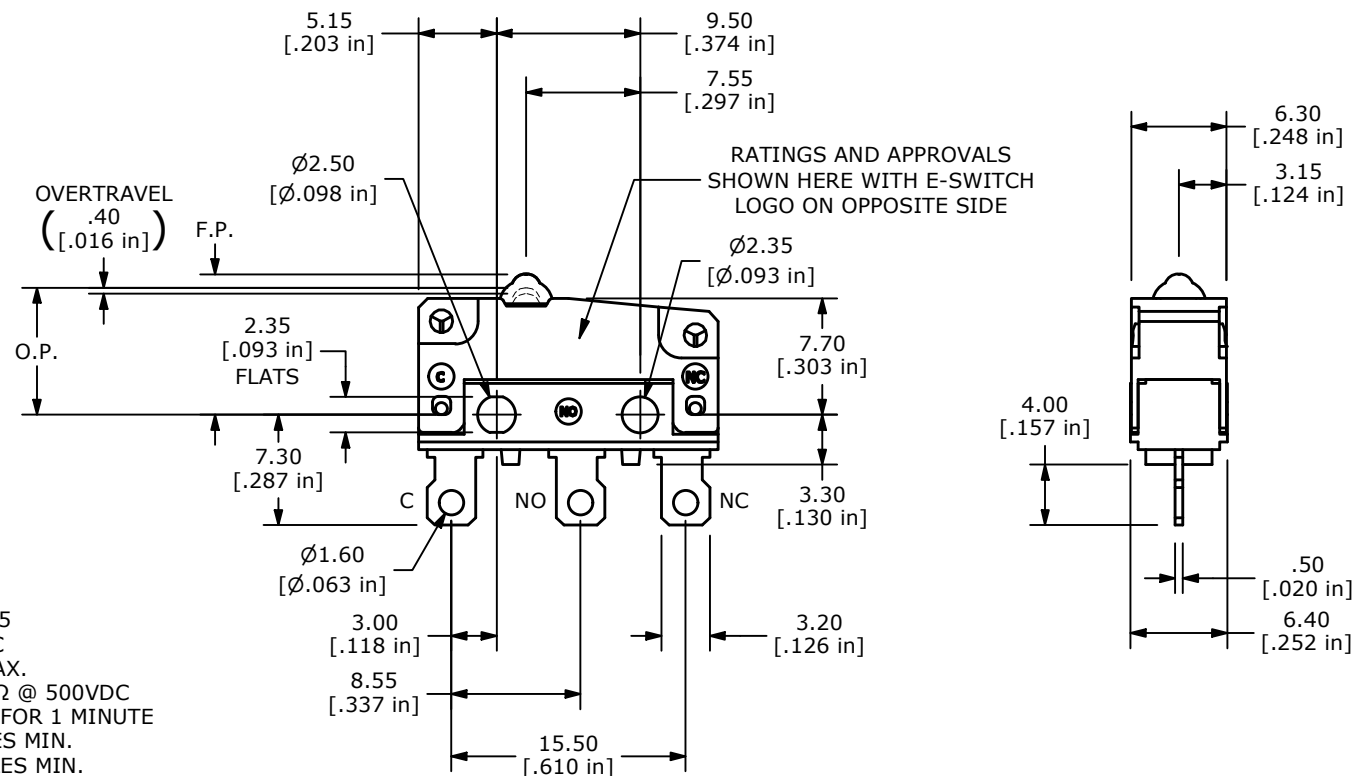

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-100686	NEW RELEASE	03/11/22	MR	TITLE WS20850100F183S1A				100120851
					SCALE	DATE	DR	DWG	REV
					2:1	1/24/2022	MJR	N020500	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED