




# 4RH Series

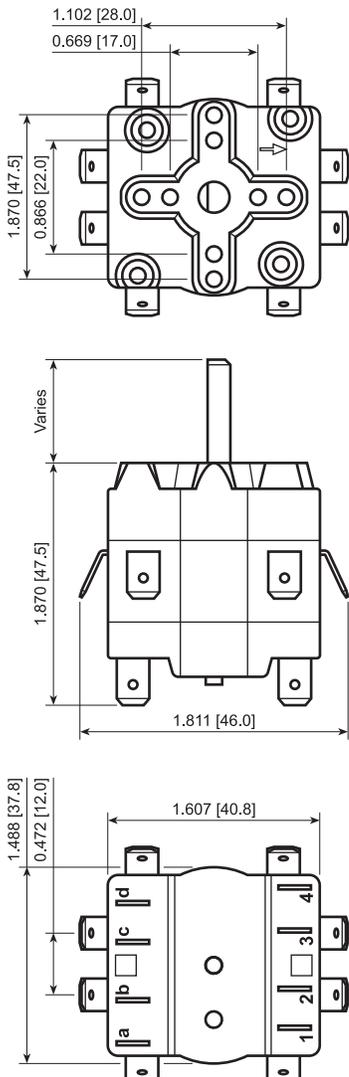

## Mounting Options

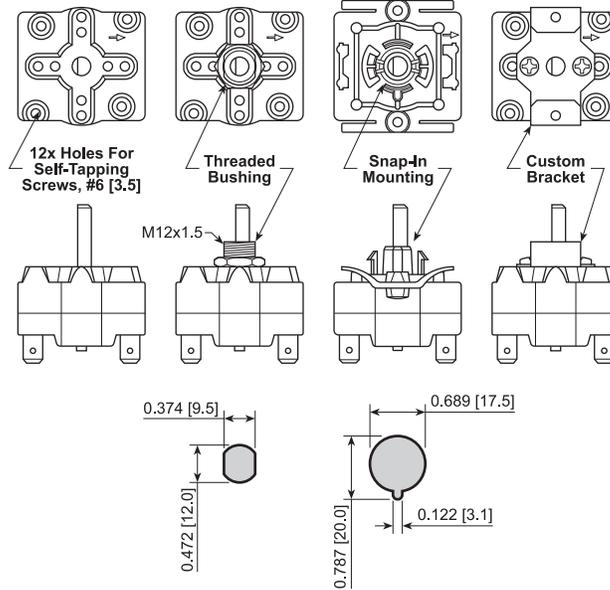

## Number of Circuits

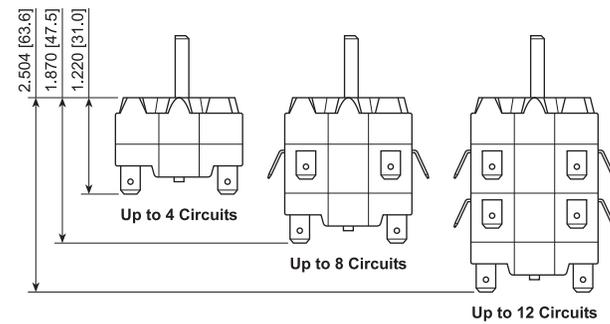

## FEATURES:

- High Current Capacity
- Up To 12 Circuits
- Multiple Terminal & Actuator Options
- Housing Made of Rugged Glass Reinforced Nylon

## SPECIFICATIONS:

**RATING:** 16A 250VAC [cULus]

12A 250VAC [cULus]

25A 250VAC [cULus]

(Upon Request)

1HP 120VAC [cULus]

2HP 250VAC [cULus]

16(4)A 250VAC [ENEC]

12(3)A 250VAC [ENEC]

10(2)A 400VAC [ENEC]

8(2)A 400VAC [ENEC]

16(8)A 250VAC [ENEC]

(Upon Request)

10(4)A 400VAC [ENEC]

(Upon Request)

**ELECTRICAL LIFE:** 300,000 Cycles

**TEMPERATURE RATING:** -20°C to 105°C

## MATERIALS:

**Body:** Polyamide 6/6, UL94 V-2

**ACTUATOR:** Polyamide 6/6, UL94 V-2

**CONTACTS:** Silver Alloy

**MOBILE CONTACTS:** Silver Alloy

**TERMINALS:** Silver Plated Brass

**SPRINGS:** Piano Wire

Copper

**HARDWARE:** Brass



Part Number: 440455



Part Number: 440462

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE