

E200 SERIES PUSHBUTTON SWITCH

ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS



APPLICATIONS / MARKETS



RoHS

SPECIFICATIONS

Contact Arrangement: 1NO/1NC+1NO/1NC, 1NO/1NC, 2NO, 1NO
Contact Rating: 200mA @ 250VDC
 5A @ 250VAC [VDE](Pending)
 6A @24 VDC
 8A @ 125VAC
Agency Approvals: ANSI/UL508, VDE (Pending)
Contact Resistance: 50mΩ Max. (Initial)
Insulation Resistance: 100 MΩ Min. @ 500VDC
Dielectric Strength: 1,500VAC
Electrical Life: 50,000 Cycles MIN
Mechanical Life: 100,000 Cycles MIN
Operating Temperature: -25°C to 55°C (with lamp)
 -25°C to 70°C (without lamp)
Storage Temperature: -40°C to 85°C
Actuation Force: 2.0 kgf
Panel Thickness: 5.0mm MAX.
Moisture Protection: IP65

FEATURES & BENEFITS

- Easy operation
- High actuation force
- Multiple illumination options
- Pushlock turn design to reset
- 16mm cutout size
- IP65 rated

PART NUMBER CONFIGURATOR

Series	Actuator Options	Housing Options	Illumination Options	Actuator Color
<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> E200	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> R11 = Illuminated R22 = Non-Illuminated	<input type="checkbox"/> <input type="checkbox"/> A1 = Illuminated 1NO/1NC+1NO/1NC B1 = Illuminated 1NO/NC C1 = Non-Illuminated 1NO/1NC+1NO/1NC D1 = Non-Illuminated 1NO/1NC	<input type="checkbox"/> <input type="checkbox"/> 0 = No Lamp F = Neon 110V AC G = Neon 220V AC H = LED 6V DC J = LED 12V DC K = LED 24V DC K1 = LED 12 to 24 V AC/DC P = LED 120V AC A = Incandescent 6V AC/DC 200mA B = Incandescent 14V AC/DC 80 mA C = Incandescent 28V AC/DC 40mA D = Incandescent 48V AC/DC 25mA E = Incandescent 60V AC/DC 20mA M = Incandescent 6V AC/DC 40mA N = Incandescent 14V AC/DC 40mA L = Incandescent 33V AC/DC 35mA	<input type="checkbox"/> R = Red

Specifications subject to change without notice 5.31.2024



E-SWITCH®







www.e-switch.com

800.867.2717

1

E200 SERIES PUSHBUTTON SWITCH

BODY DIMENSIONS - ILLUMINATED

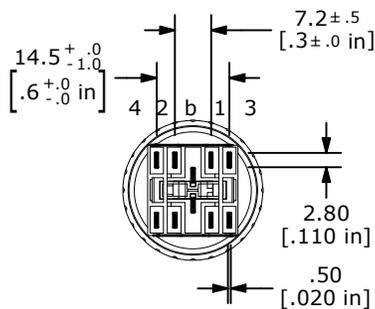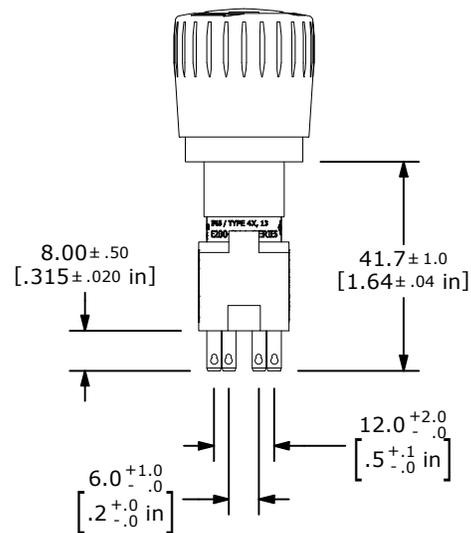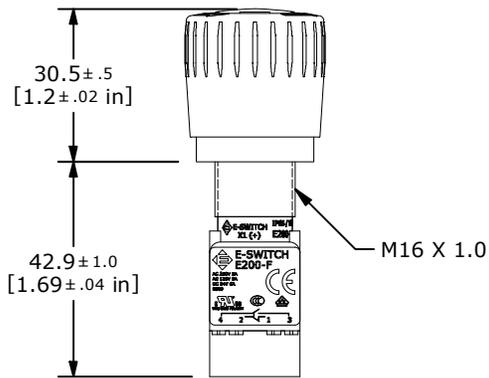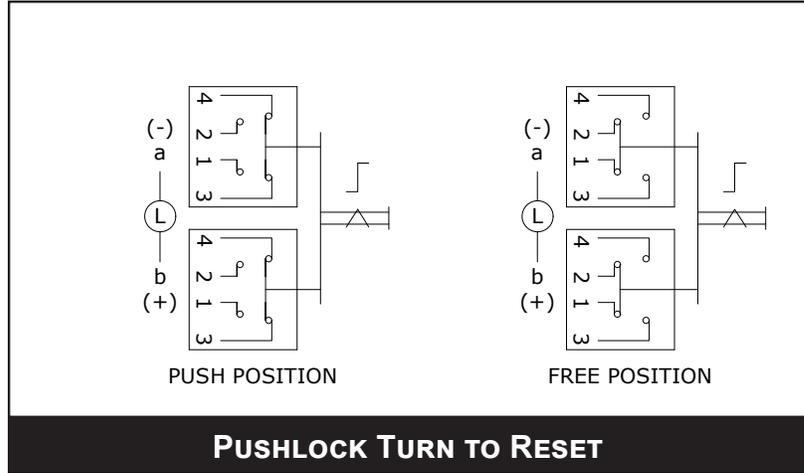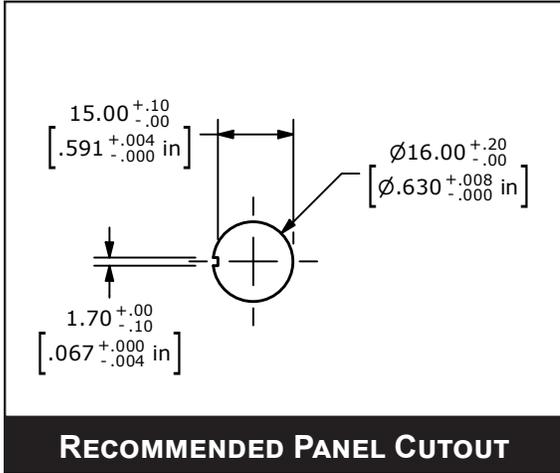

BOTTOM VIEW SHOWN WITHOUT SHROUD ACTUATOR



ANTI-VANDAL SWITCHES
 DETECTOR SWITCHES
 DIP SWITCHES
 KEYLOCK SWITCHES
 NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
 ROTARY SWITCHES
 ROTARY SWITCHES
 SLIDE SWITCHES
 SNAP ACTION SWITCHES
 TACTILE SWITCHES
 TOGGLE SWITCHES
 CAP OPTIONS

E200 SERIES PUSHBUTTON SWITCH

BODY DIMENSIONS - NON-ILLUMINATED

