

PBA22 SERIES PUSHBUTTON SWITCH



SPECIFICATIONS

Contact Arrangement: SPST, DPST
Contact Rating: 6A @ 230VAC, 1.5A @ 24VDC
Contact Resistance: 50m Ω MAX
Insulation Resistance: 100m Ω MIN
Dielectric Strength: 600VAC
Electrical Life: 500,000 Cycles
Operating Temperature: -25°C to +65°C
Storage Temperature: -30°C to +70°C
Travel: 5.3 [.21 in]
Moisture Protection: IP65 (front face), IP20 (rear face)
Actuation Force: 9.1 - 9.5 Nm
Panel Thickness: 1 - 6.0 [.04 - .24 in]
Mounting Nut Torque: .5Nm

FEATURES & BENEFITS

22mm diameter Panel Cutout
Modular interface/contact block design
Robust product for industrial applications
Attractive front panel design
Quick Connect - 0.110" termination
IP65 (front face), IP20 (rear face)
Multiple function options
Multiple actuator color options

PART NUMBER CONFIGURATOR

Series

PBA22

Actuator

F - Flat

Terminal

2 - Quick Connect - 0.110"

Function

A - SPST Off-(On)
B - SPST On-(Off)
C - DPST Off-(On)
D - DPST On-(Off)
E - DPST-NO/NC 1P Off-(On) + 1P On-(Off)





Actuator Color

RED - Red
GRN - Green
BLU - Blue
ORG - Orange
WHT - White
BLK - Black



PBA22 SERIES PUSHBUTTON SWITCH

BODY DIMENSIONS

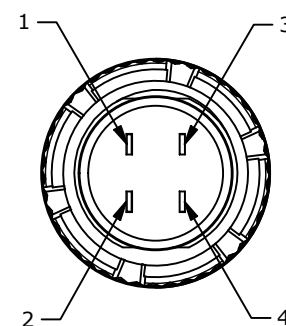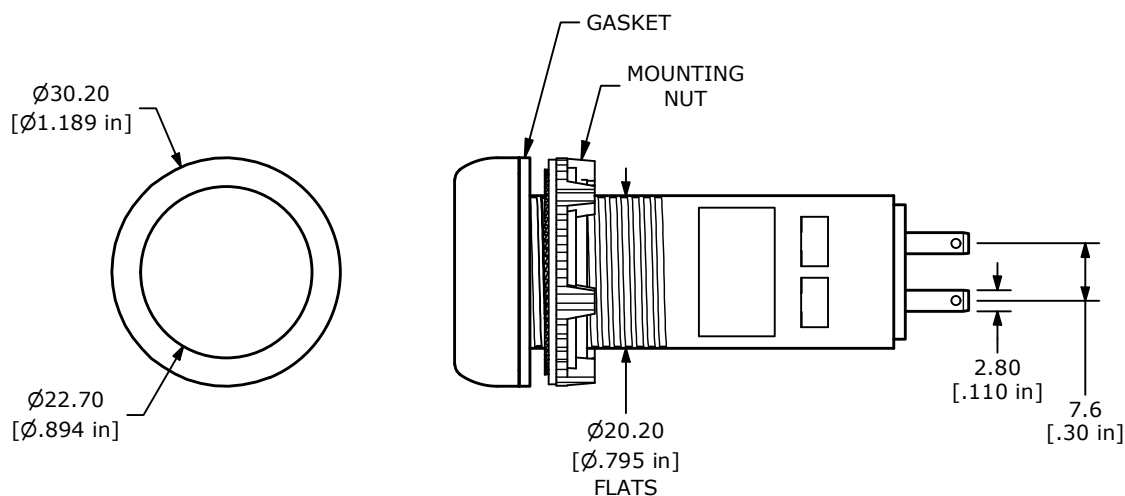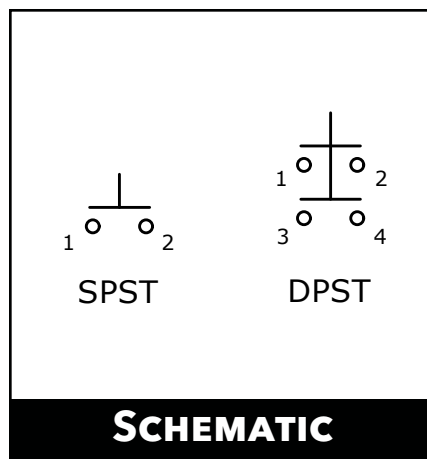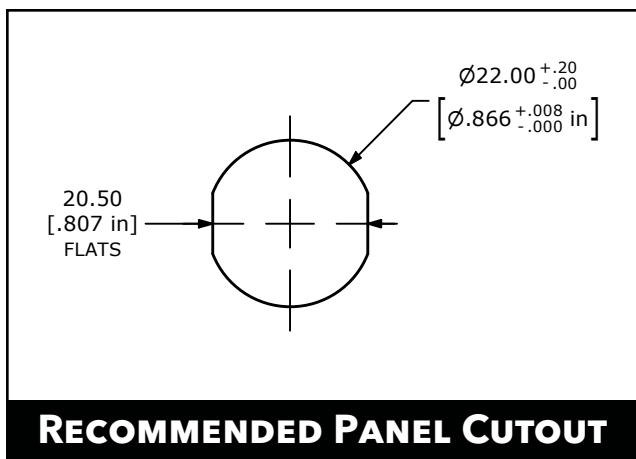

TERMINALS 3 AND 4 ARE NOT ON THE SPST VERSIONS

