

RCA1913 SERIES ROCKER SWITCH



SPECIFICATIONS

Electrical Rating: 16(8)A, 125/250VAC
10(4)A, 125/250VAC
16A, 30VDC

Electrical Life: 10,000 Cycles

Contact Resistance: 20mΩ Max.

Insulation Resistance: 100MΩ Min. at 500VDC

Dielectric Strength: 1,500VAC for 1 minute

Ingress Protection: Full IP68

Panel Cutout: 19 x 13mm panel cutout

Contact Arrangement: SPST, SPDT

Base Material: Nylon 66 UL94V-2

Actuator: PC/Nylon66 UL94V-2

Operating/Storage Temperature: 0°C to 55°C

FEATURES & BENEFITS

SPST and SPDT

19mm x13mm panel cutout

Multiple termination options

Full IP68

UL File Number E194579

ENEC License ENEC-05335-A1

Soldered wire leads (300mm long) optional

PART NUMBER CONFIGURATOR

Series

RCA1913

Terminal

F - Quick Connect - 0.187"

S - Solder

P - PC Pin

R - PC Pin, Right Angle

W - Wire Leads 300mm

Function

1 - On-Off

2 - On-On

3 - On-Off-On

Rating

A - 16(8)A
125/250VAC~T55

B - 10(4)A
125/250V~T55

C - 16A
30VDC T55

Body Color

BLK - Black

WHT - White

Actuator Color

BLK - Black

RED - Red

WHT - White

Marking Color

N - None

BLK - Black

WHT - White

Marking Type

N - None

1 - Hi/Lo





2 - On/Off

3 - I/O Vert.

4 - I/O Horz.

5 - •






QUICK CONNECT 0.187" TERMINAL

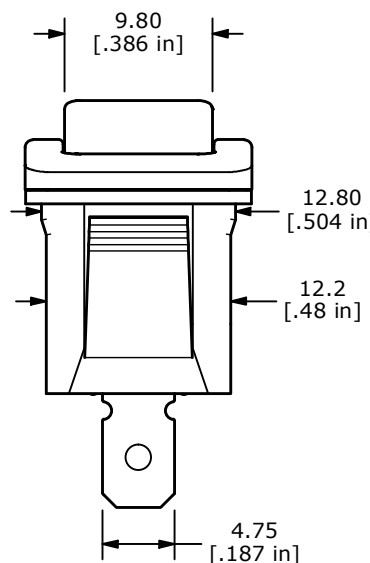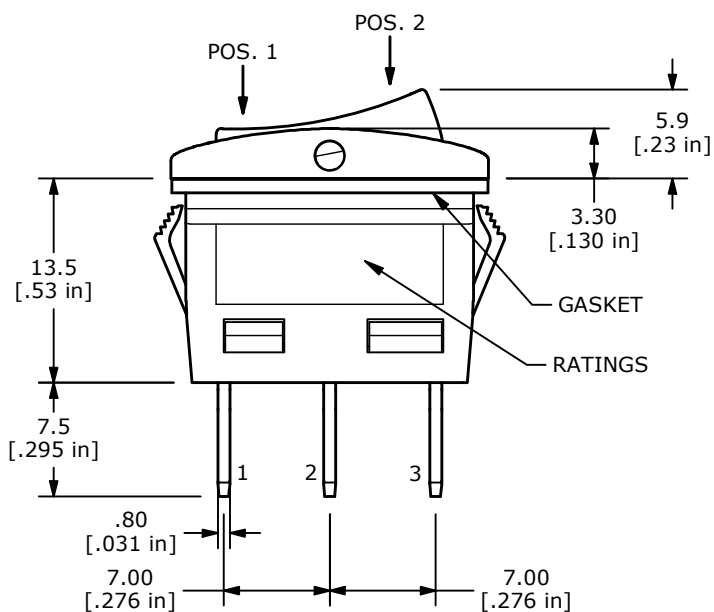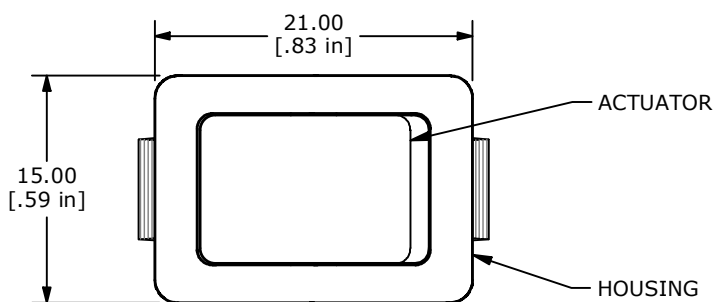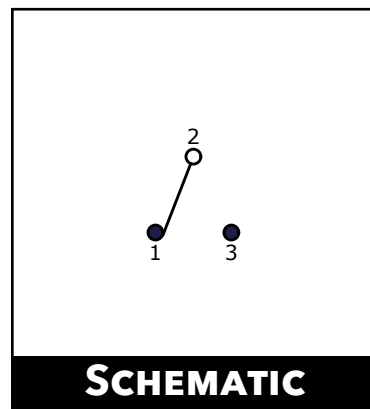



RCA1913 SERIES ROCKER SWITCH - BODY DIMENSIONS




SOLDER TERMINAL

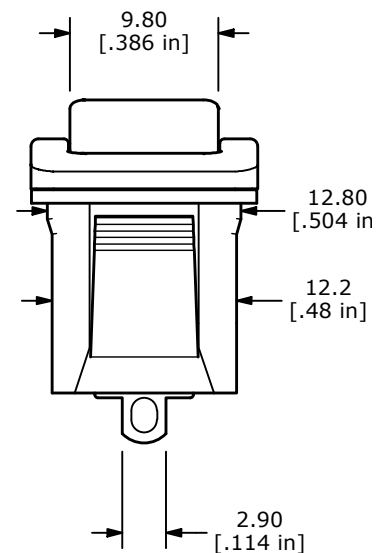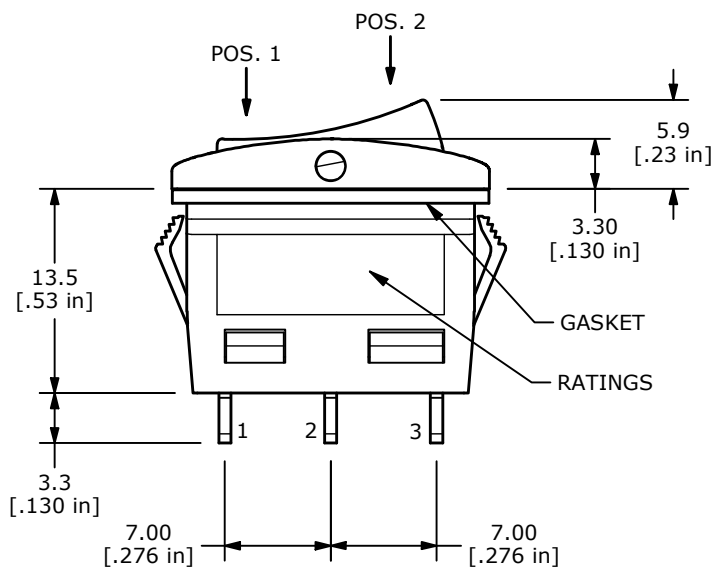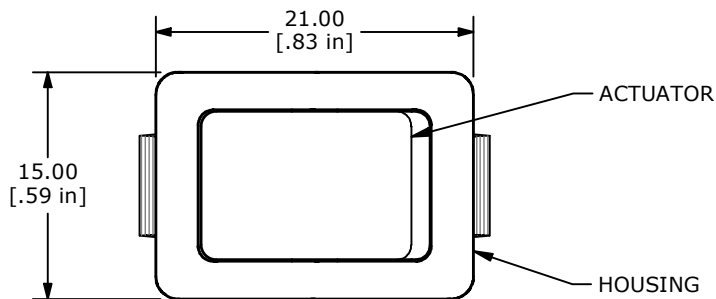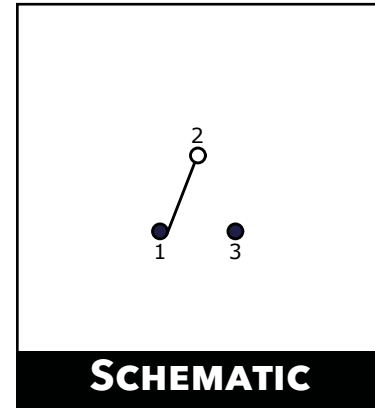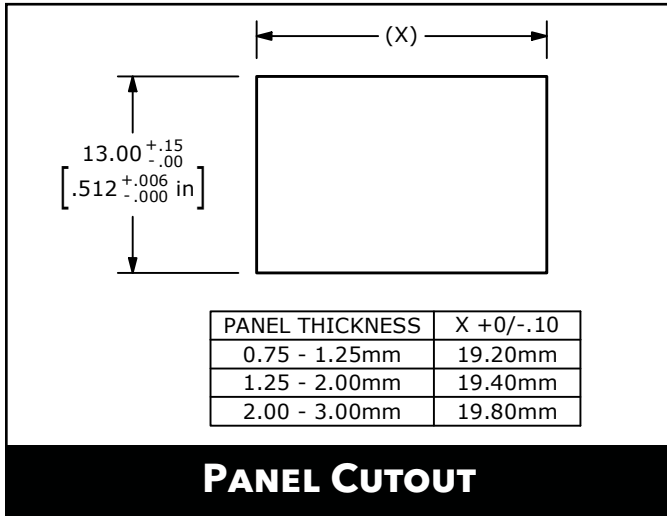



RCA1913 SERIES ROCKER SWITCH - BODY DIMENSIONS

WIRE LEADS

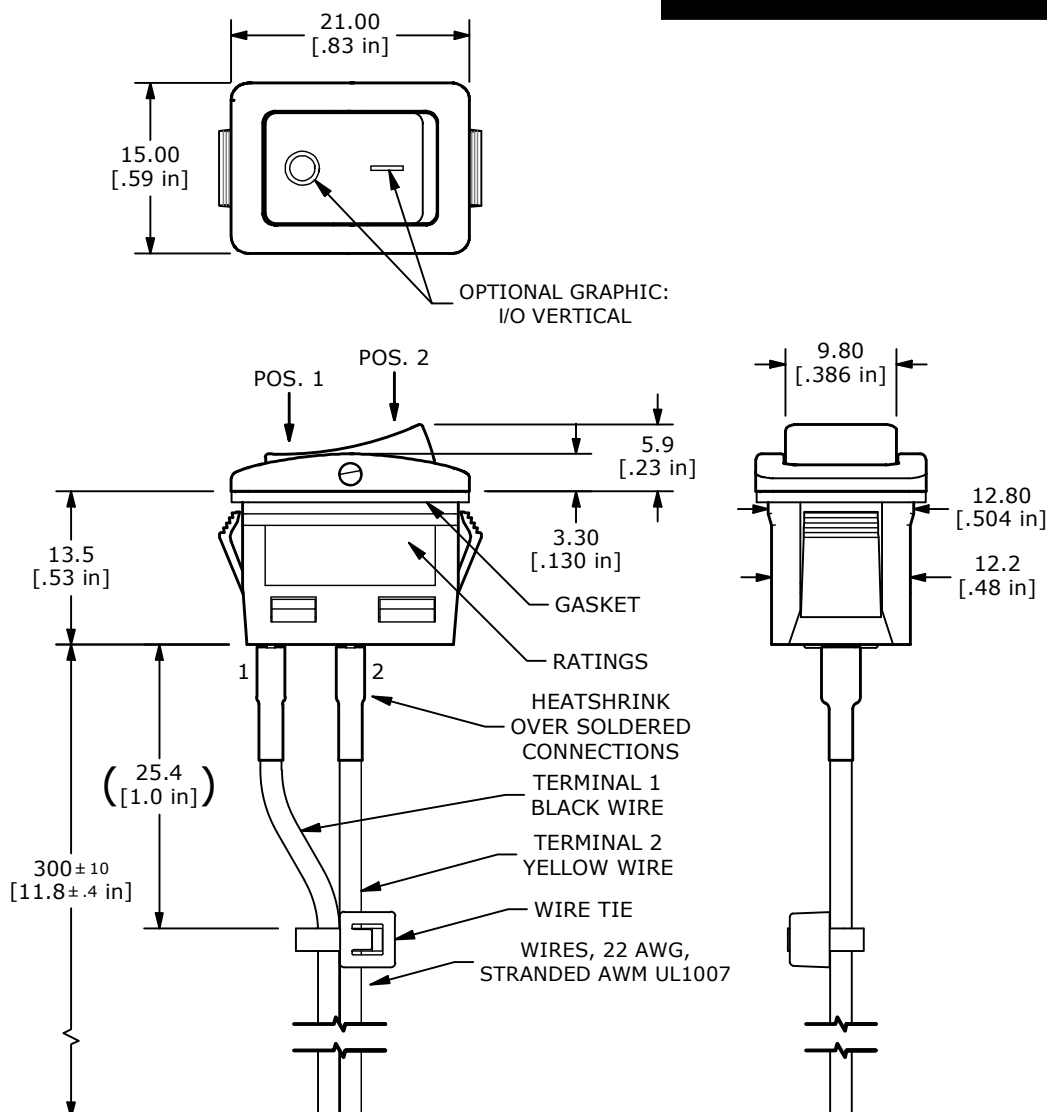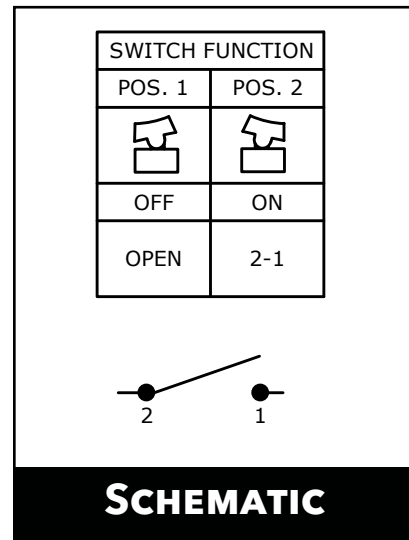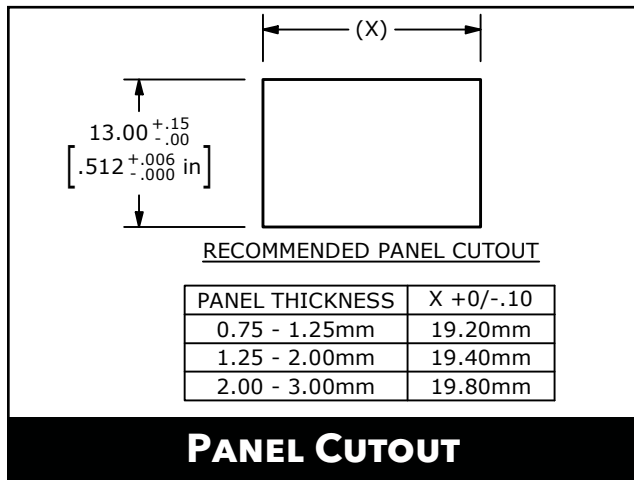

RCA1913 SERIES ROCKER SWITCH - BODY DIMENSIONS

WIRE LEADS

