


SERIES TL3313 SWITCHES



SUB-MINIATURE TACTILE

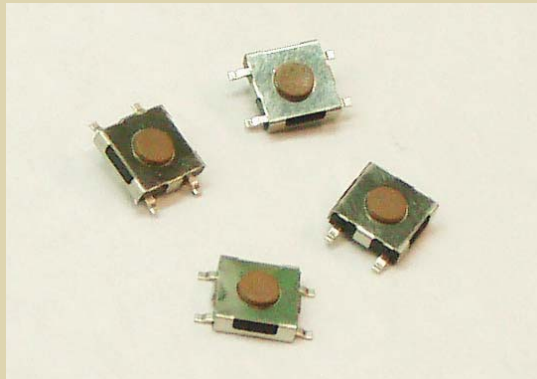

FEATURES & BENEFITS

Sub-miniature

APPLICATIONS / MARKETS

Computer Servers/peripherals
Performance Audio
Instrumentation
Telecommunications/networking

MECHANICAL SPECIFICATIONS

| | |
|------------------|---|
| Mechanical Life: | 100,000 cycles |
| Force: | 100 +/- 50 gf; 160 +/- 50 gf; 250 +/- 50 gf |
| Travel: | 0.25 mm +0.2 /-0.1mm |


ELECTRICAL SPECIFICATIONS

| | |
|------------------------|----------------------|
| Electrical Life: | 100,000 cycles |
| Contact Rating: | 50mA @ 12VDC |
| Contact Resistance: | 50mΩ (initial max) |
| Insulation Resistance: | 100MΩ (Min @ 100VDC) |
| Dielectric Strength: | 250VAC (1 minute) |

ENVIRONMENTAL SPECIFICATIONS

| | |
|------------------------|----------------|
| Operating Temperature: | -40°C to +85°C |
| Storage Temperature: | -40°C to +85°C |

HOW TO ORDER:

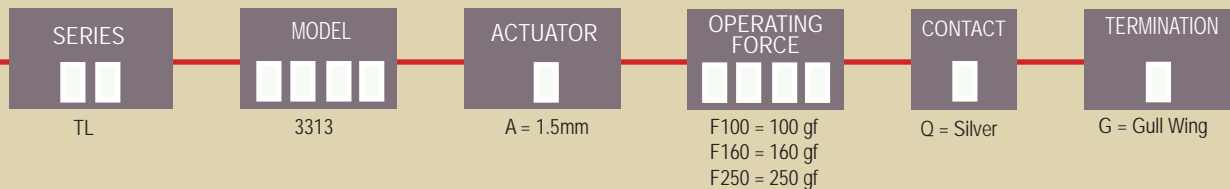

Example Ordering Code: TL-3313-A-F100-Q-G

Specifications subject to change without notification. 3/5/2021

