
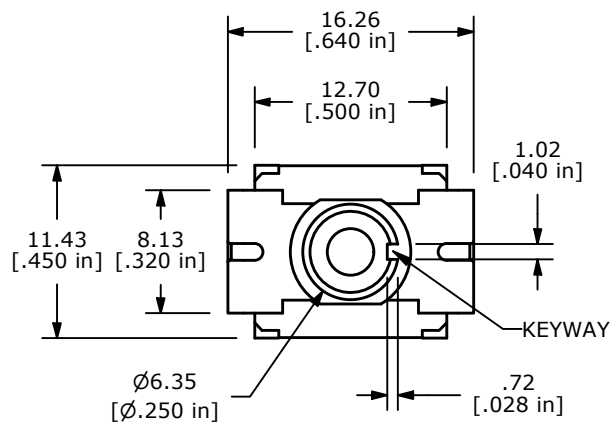
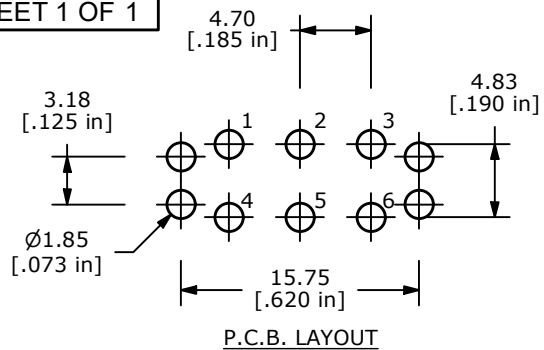




SWITCH FUNCTION	
POS. 1	POS. 2
	
ON	(ON)
1-3, 4-6	1-2, 4-5

() = MOMENTARY



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 1A @ 250 VAC
3A @ 120 VAC OR 28 VDC MAX.
6. ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD
7. MECHANICAL LIFE: 50,000 CYCLES
8. INSULATION RESISTANCE: 1,000 M Ω MIN.
- ▲ 9. ACTUATION FORCE: 800 $\pm$ 200gf
10. TRAVEL: 1.0 $\pm$ 0.2mm
11. CONTACT RESISTANCE: 20 m Ω MAX.
TYPICAL @ 2-4 VDC
12. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL.
13. OPERATING TEMP.: -40°C to 85°C
14. ▲ DENOTES CRITICAL PARAMETER.

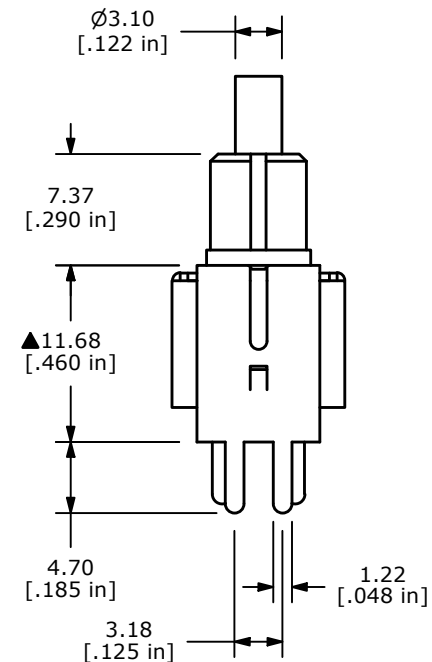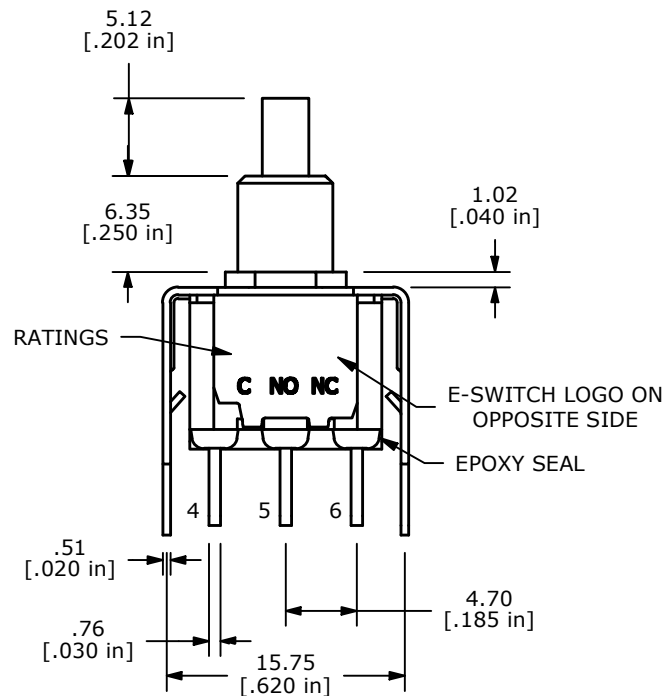

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
C	ECO-102926	700 SERIES UPDATE	10/14/24	JS						000025792
					TITLE 700DP7B20VS2QE					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 2:1	DATE 7/11/2011	DR BGL	DWG T721013	REV C	