



O.P. (MM)	P.T. (MM)
8.5 ± 0.3	1.1 MAX

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
3. RATING: 5A @125/250VAC UL, CUL
- ▲ 4. OPERATING FORCE: 80 ± 25 GRAMS
5. OPERATING TEMP: -25°C TO 85°C
6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
8. INSULATION RESISTANCE: 100 MEGA-OHMS
9. DIELECTRIC STRENGTH: 1000VAC 1 MINUTE (INITIAL VALUE)
10. CONTACT RESISTANCE: 100 MILLI-OHMS MAX.
11. ▲ DENOTES CRITICAL PARAMETER.

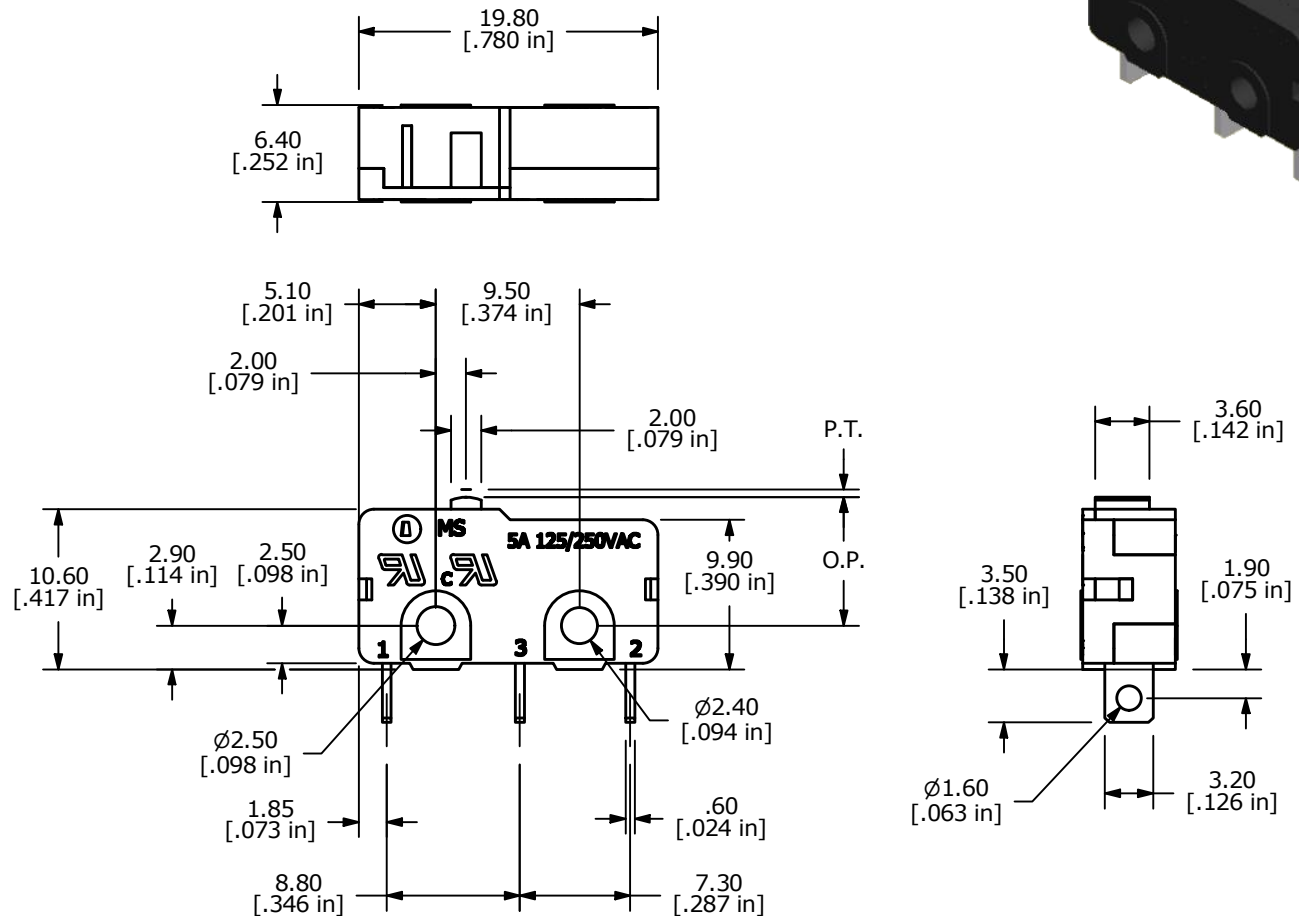

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®				OBJECT ID
E	ECO-100766	REMOVE VDE RATING AND LOGO	03/03/22	JS					000021140
					TITLE				MS0850500F080S1A
					SCALE	DATE	DR	DWG	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					2:1	2/7/2005	AR	Q970001	E