

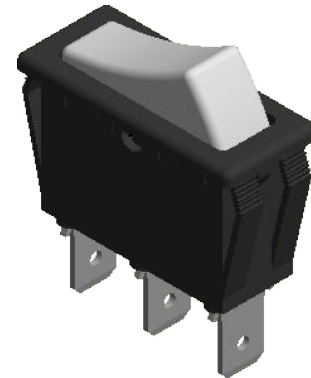


PANEL CUTOUT

PANEL THICKNESS	(x)
0.75 - 1.25	30.0
1.25 - 2.00	30.4
2.00 - 3.00	30.7


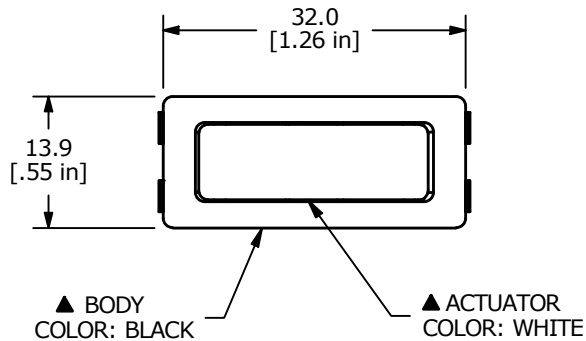


SWITCH FUNCTION	
POS. 2	POS. 1
ON	(ON)
2-3	2-1



NOTE:

- DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- CONTACT RATINGS:
ANSI/UL 1054
16A @ 125VAC T65
16A @ 250VAC T65
- CONTACT RESISTANCE: 20mΩ MAX. @ 50VAC INITIAL
- INSULATION RESISTANCE: 100MΩ MIN. @ 500VDC
- DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE
- ELECTRICAL LIFE: 6,000 CYCLES [cURus]
- OPERATING TEMPERATURE: 0°C to 65°C [cURus]
- ILLUMINATION VOLTAGE: NON-ILLUMINATED
- ▲ DENOTES CRITICAL PARAMETER

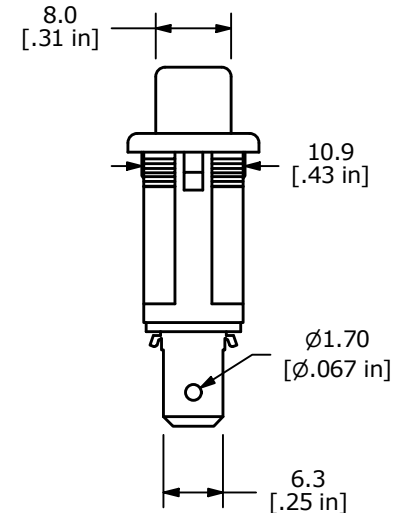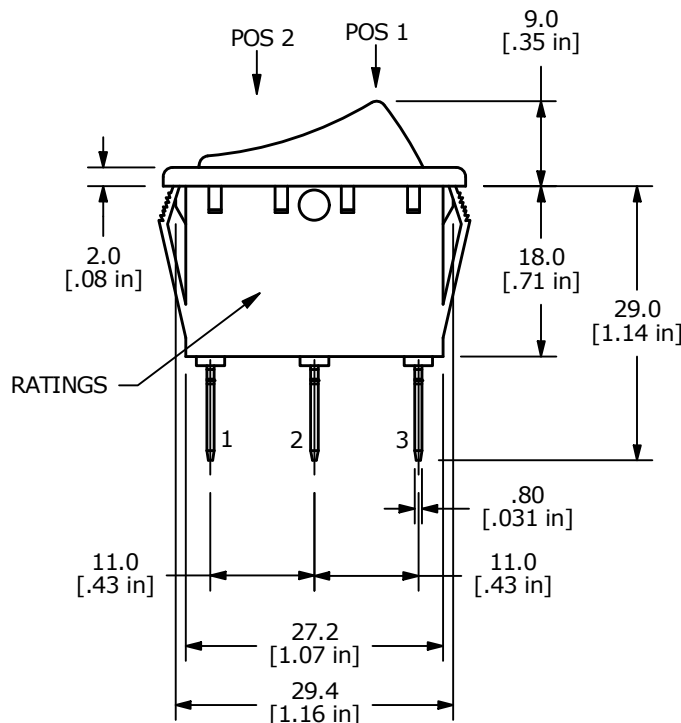

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-101734	CORRECT TERMINAL CALLOUT	03/14/23	JS	TITLE RB14BE1200				100123587
B	ECO-101682	CORRECT SWITCH FUNCTION	02/27/23	JS					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 1:1	DATE 2/2/2023	DR JS	DWG 14-RB14BE1200	REV C